# INPUT Frequency 10 MHz Level +7 dBm ±6 dB into 50 ohms OUTPUTS

RF Output	Frequency	Output Level (into 50 ohms)
Α	100 MHz	+13 dBm ±2 dB
В	500 MHz	+13 dBm ±2 dB
С	1 GHz	+13 dBm +2 dB

# STABILITY

# Aging (free-running)

1 x 10<sup>-6</sup> first year

after 30 days operating, typical

5 x 10<sup>-7</sup> second year, typical

3 x 10<sup>-7</sup> per year thereafter, typical

# Phase Noise L(f), dBc/Hz, typical, (free-running)

	100 MHz	500 MHz	1 GHz
10 Hz	-100	-85	-79
100 Hz	-130	-115	-109
1 kHz	-158	-143	-136
10 kHz	-174	-159	-153
100 kHz	-175	-160	-154
1 MHz	-176	-161	-155
10 MHz	-177	-162	-155

# Temperature Stability

 $\pm 5 \times 10^{-7}$  free-running from 0 to  $\pm 50^{\circ}$ C (Ref.  $\pm 25^{\circ}$ C)

**Harmonics** 

-25 dBc

# **Sub-Harmonics**

-60 dBc

#### **PLL Divider Products**

-60 dBc

# **Spurious**

-80 dBc, excluding power supply line related spurs

# **Phase Lock Alarm**

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi) Out-of-Lock: +0.8 VDC max (Lo)

# **Phase Lock Voltage Monitor**

Voltage monitor pin supplied

# MECHANICAL

**Dimensions** 

4.4 x 4 x 1"

#### Connectors

RF Input/Outputs: SMA(f)

Power, Monitoring: Feed Thru Terminals

**GND: Ground Turret** 

# **Packaging**

Nickel-plated machined aluminum housing – J2P-013

#### Mounting

Threaded inserts on base, #2-56, 6 places

# **POWER REQUIREMENTS**

# Warm-Up Power

≤ 13 Watts for 5 minutes

#### **Total Power**

≤ 9 Watts at +25°C

# **Supply Voltage**

+15 VDC ±5%

# **ADJUSTMENT**

# Loop BW

Target Bandwidth: ≤ 10 Hz Type 2 Loop

#### **CRYSTAL**

# **Type**

100 MHz SC-cut (x10)

# OTHER

# Label

Use conventional label with the following information:

501-25477 (Current Rev.)

100M/500M/1G MXO-PLD

+15 VDC

Serial # - Date Code


(Mark connectors with function)


#### Test Data

- Output Level
- Phase Noise free-running
- Temperature Stability free-running
- Harmonics, Subs, Products, Spurious
- Power Warm-up and Total

REV	DATE	REVISION RECORD	DWN	AUTH
-	03-28-12	Initial Release	PAC	

J2P-013 MXO Connections		
Connector	Function	
1	Supply Voltage	
2	Ground, Case	
4	RF Output C	
5	Phase Lock Voltage	
6	Phase Lock Alarm	
7	External Reference Input	
8	RF Output A	
9	RF Output B	

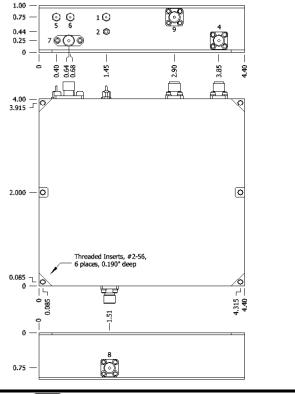



####