

OUTPUT

Frequency

10 MHz

Level

+13 dBm ± 2 dB into 50 ohms

STABILITY

Aging

5×10^{-10} per day

after 30 days operating, typical

Phase Noise L(f), Static

10 Hz -140 dBc/Hz

100 Hz -160 dBc/Hz

1 kHz -172 dBc/Hz

10 kHz -174 dBc/Hz

Temperature Stability

$\pm 2 \times 10^{-8}$, 0° to +50°C (Ref +25°C)

Harmonics

≤ -30 dBc

Spurious

≤ -90 dBc, excluding power
supply line related spurs

MECHANICAL

Dimensions

2.25 x 2.25 x 0.8"

Connectors

SMA(f) and solder pins on side

Packaging

Nickel-plated machined
aluminum case (CH-1A)

POWER REQUIREMENTS

Warm-Up Power

≤ 7.5 Watts for 5 minutes

Total Power

≤ 5 Watts at +25°C

Supply Voltage

+15 VDC $\pm 5\%$

ADJUSTMENT

Mechanical Tuning

$\pm 1 \times 10^{-6}$

Electrical Tuning

$\pm 2 \times 10^{-7}$ min, ± 5 VDC

Negative slope

CRYSTAL

Type

10 MHz SC-cut (Special Low-G)

Acceleration Sensitivity

$\leq 5 \times 10^{-10}$ /g per axis, typical

ENVIRONMENTAL

Operating Temperature

0° to +50°C

Storage Temperature

-40° to +85°C

OTHER

Label

Use conventional label with the
following information:

501-23750 (Current Rev.)

10 MHz Citrine

+15 VDC

Serial # - Date Code

Test Data

Output Level

Phase Noise, Static


Temperature Stability

Harmonics, Spurious

Power – Warm-up and Total

Tuning – MT and ET

REV	DATE	REVISION RECORD	DWN	AUTH
-	03-09-11	Initial Release	PAC	
A	04-20-11	Output Level; Power	PAC	
B	06-01-11	Updated Drawing	PAC	
C	03-29-16	10 Hz phase noise	BH	BB
D	04-18-17	Increased Power Requirements	CB	

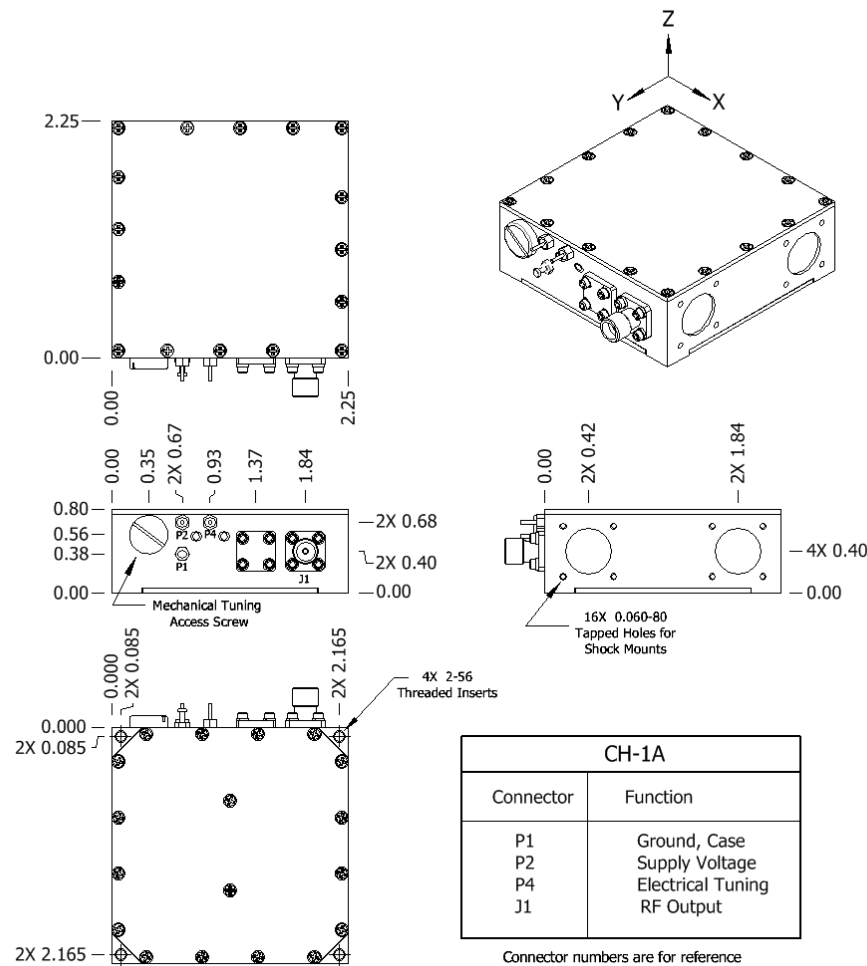

Wenzel Associates, Inc.

Austin, Texas

Title:

Premium 10 MHz-SC Citrine Crystal Oscillator

P/N:

501-23750

Rev:

D

Date:

04-18-17

Drawn:

Ref:

ULN

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:
 ± 0.030 "

0.XXX Dec:
 ± 0.010 "

FSCM:
62821

Page 1 of 1