

INPUT

Frequency

10 MHz

Level

+13 dBm \pm 1 dB into 50 ohms

OUTPUTS

RF Output	Frequency	Output Level (into 50 ohms)
A	100 MHz	+13 dBm \pm 2 dB
B	500 MHz	+13 dBm \pm 2 dB
C	1 GHz	+13 dBm \pm 2 dB

STABILITY

Aging (free-running)

1 x 10⁻⁶ first year

after 30 days operating, typical

5 x 10⁻⁷ second year, typical

3 x 10⁻⁷ per year thereafter, typical

Phase Noise L(f), typical, (free-running)

	100 MHz	500 MHz	1 GHz
10 Hz	-100	-85	-79
100 Hz	-130	-115	-109
1 kHz	-158	-143	-136
10 kHz	-174	-159	-153
100 kHz	-175	-160	-154
1 MHz	-176	-161	-155
10 MHz	-177	-162	-155

Temperature Stability

\pm 5 x 10⁻⁷ free-running from 0 to +50°C
(Ref. +25°C)

Harmonics

-25 dBc

Sub-Harmonics

-60 dBc

PLL Reference Products

-60 dBc

Spurious

-80 dBc, excluding power
supply line related spurs

Phase Lock Alarm

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

Phase Lock Voltage Monitor

Voltage monitor pin supplied

MECHANICAL

Dimensions

5.36 x 4 x 1"

Connectors

RF Input/Output: SMA(f)

Power, Monitoring: Feed Thru Terminals

GND: Ground Turret

Packaging

Nickel-plated machined

aluminum housing – J2PM-013

Mounting

Threaded inserts on base,

6 places, #2-56

POWER REQUIREMENTS

Warm-Up Power

\leq 14.5 Watts for 5 minutes

Total Power

\leq 11.5 Watts at +25°C

Supply Voltage

+15 VDC \pm 5%

ADJUSTMENT

Loop BW

Target Bandwidth: ~200 Hz

Type 2 Loop

CRYSTAL

Type

100 MHz SC-cut (x10)

OTHER

Label

Use conventional label with the
following information:

501-25488 (Current Rev.)

100M/500M/1G MXO-PLM

+15 VDC

Serial # - Date Code

(Mark connectors with function)


Test Data

- Output Level
- Phase Noise – free-running
- Harmonics, Subs, Products, Spurious
- Power – Warm-up and Total

REV	DATE	REVISION RECORD	DWN	AUTH
-	01-15-14	Initial Release	PAC	

J2PM-013 MXO Connections

Connector	Function
1	Supply Voltage
2	Ground, Case
4	RF Output C
5	Phase Lock Voltage
6	Phase Lock Alarm
7	External Reference Input
8	RF Output A
9	RF Output B

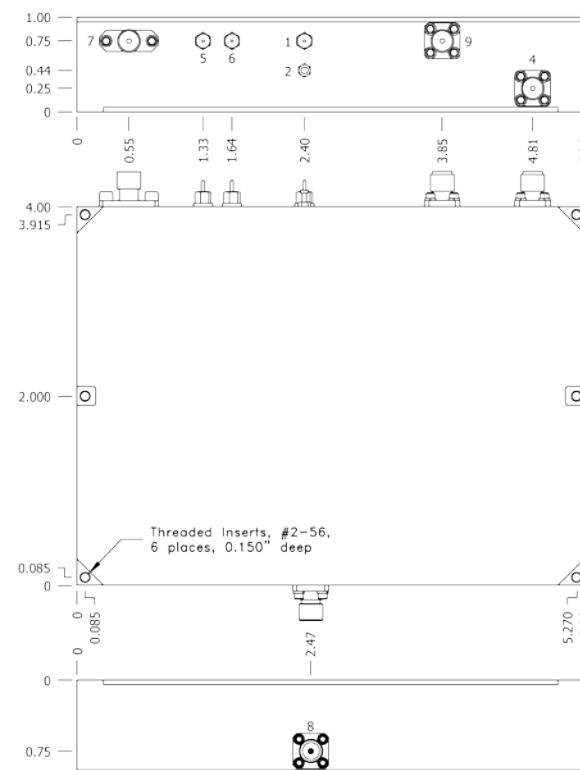

Wenzel Associates, Inc.

Austin, Texas

Title:

**100 MHz, 500 MHz & 1 GHz
Multiplied Crystal Oscillator (MXO-PLM)**

P/N:

501-25488

Rev:

-

Date:

01-15-14

Drawn:

Ref:

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

\pm 0.030"

0.XXX Dec:

\pm 0.010"

FSCM:

62821

Page 1 of 1