

## INPUT

### Frequency

10 MHz

### Level

+13 dBm  $\pm$ 1 dB into 50 ohms

## OUTPUT

### Frequency

10 GHz

### Level

+13 dBm  $\pm$ 2 dB into 50 ohms

## STABILITY

### Aging (free-running)

1 x 10<sup>-6</sup> first year

after 30 days operating, typical

5 x 10<sup>-7</sup> second year, typical

3 x 10<sup>-7</sup> per year thereafter, typical

### Phase Noise L(f), typical, (free-running)

100 Hz -87 dBc/Hz

1 KHz -113 dBc/Hz

10 KHz -131 dBc/Hz

100 KHz -132 dBc/Hz

### Temperature Stability

$\pm$ 5 x 10<sup>-7</sup> free-running from 0 to +50°C  
(Ref. +25°C)

### Harmonics

$\leq$  -25 dBc

### Sub-Harmonics

$\leq$  -60 dBc

### PLL Reference Products

$\leq$  -60 dBc

### Spurious

$\leq$  -80 dBc, excluding power  
supply line related spurs

### Phase Lock Alarm

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

### Phase Lock Voltage Monitor

Voltage monitor pin supplied

## MECHANICAL

### Dimensions

6.31 x 4 x 1"

## Connectors

RF Input/Output: SMA(f)

Power, Monitoring: Feed Thru Terminals

GND: Ground Turret

## Packaging

Nickel-plated machined  
aluminum housing – J3PM

## Mounting

Threaded inserts on base,  
6 places, #2-56

## POWER REQUIREMENTS

### Warm-Up Power

$\leq$  19 Watts for 5 minutes

### Total Power

$\leq$  15.5 Watts at +25°C

### Supply Voltage

+15 VDC  $\pm$ 5%

## ADJUSTMENT

### Loop BW

Target Bandwidth: ~200 Hz

Type 2 Loop

## CRYSTAL

### Type

100 MHz SC-cut (x100)

## OTHER

### Label

Use conventional label with the  
following information:

501-25492 (Current Rev.)

10 GHz MXO-PLM

+15 VDC

Serial # - Date Code

(Mark connectors with function)

## Test Data

- Output Level


- Phase Noise – free-running

- Harmonics, Subs, Products, Spurious

- Power – Warm-up and Total

| REV | DATE     | REVISION RECORD | DWN | AUTH |
|-----|----------|-----------------|-----|------|
| -   | 04-12-12 | Initial Release | PAC |      |
|     |          |                 |     |      |
|     |          |                 |     |      |
|     |          |                 |     |      |
|     |          |                 |     |      |

| J3PM MXO Connections |                          |
|----------------------|--------------------------|
| Connector            | Function                 |
| 1                    | Supply Voltage           |
| 2                    | Ground, Case             |
| 4                    | RF Output                |
| 5                    | Phase Lock Voltage       |
| 6                    | Phase Lock Alarm         |
| 7                    | External Reference Input |

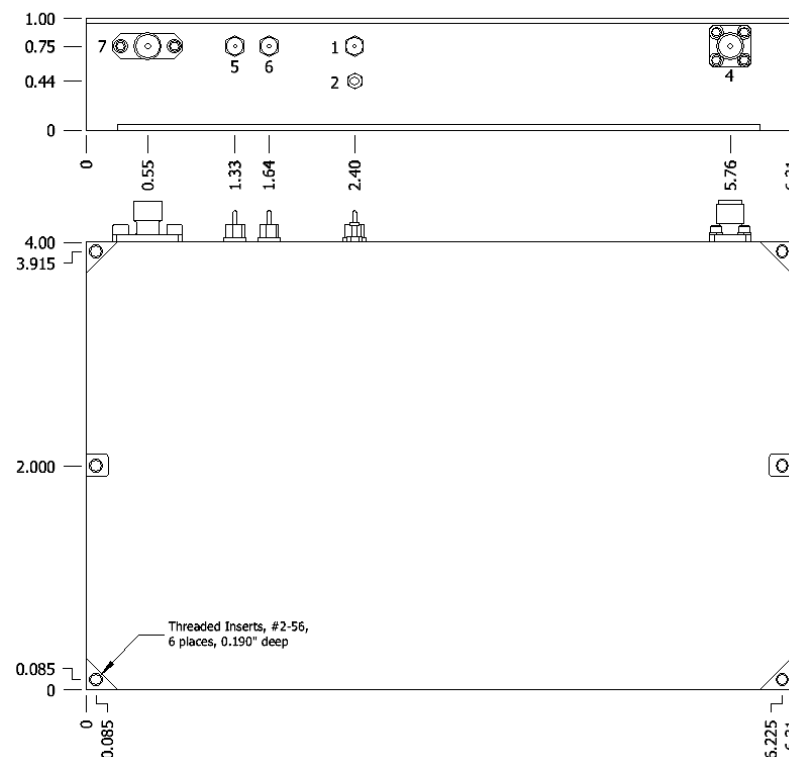

## Wenzel Associates, Inc.

Austin, Texas

Title:

**10 GHz Multiplied Crystal Oscillator (MXO-PLM)**

P/N:

**501-25492**

Rev:

-

Date:

**04-12-12**

Drawn:

Ref:

Tolerances:  
(except as noted)  
Dimensions are in inches

0.XX Dec:

**$\pm$ 0.030"**

0.XXX Dec:

**$\pm$ 0.010"**

FSCM:

**62821**

Page 1 of 2