

OUTPUT

Frequency

160 MHz

Level

+13 dBm ± 2 dB into 50 ohms

STABILITY

Aging

1×10^{-6} per year

after 30 days operating, typical

Phase Noise L(f)

100 Hz -122 dBc/Hz

1 kHz -150 dBc/Hz

10 kHz -169 dBc/Hz

100 kHz -174 dBc/Hz

1 MHz -175 dBc/Hz

10 MHz -175 dBc/Hz

Temperature Stability

$\pm 2 \times 10^{-7}$, 0° to +50°C (Ref +25°C)

Harmonics

≤ -30 dBc

Spurious

≤ -90 dBc, excluding power
supply line related spurs

MECHANICAL

Dimensions

2 x 2 x 0.7"

Connectors

SMA(f) and solder pins on side

Packaging

Nickel-plated machined
aluminum case (CV-1A)

POWER REQUIREMENTS

Warm-Up Power

≤ 6 Watts for 5 minutes

Total Power

≤ 3 Watts at +25°C

Supply Voltage

+15 VDC $\pm 5\%$

ADJUSTMENT

Mechanical Tuning

$\pm 4 \times 10^{-6}$

Electrical Tuning

$\pm 5 \times 10^{-7}$, ± 5 VDC

Negative slope

CRYSTAL

Type

160 MHz SC-Cut (low-g)

Acceleration Sensitivity

$\leq 3 \times 10^{-10}$ /g per axis, typical

ENVIRONMENTAL

Operating Temperature

0° to +50°C

Storage Temperature

-40° to +85°C

OTHER

Label

Use conventional label with the
following information:

501-26865 (Current Rev.)

160 MHz Citrine

+15 VDC

Serial # - Date Code

Test Data

Output Level

Phase Noise, Static


Temperature Stability

Harmonics, Spurious

Power – Warm-up and Total

Tuning – MT and ET

REV	DATE	REVISION RECORD	DWN	AUTH
-	05-29-13	Initial Release	PAC	
A	04-07-15	Noise	Liz	
B	02-07-19	Noise, 10 MHz	PAC	MG

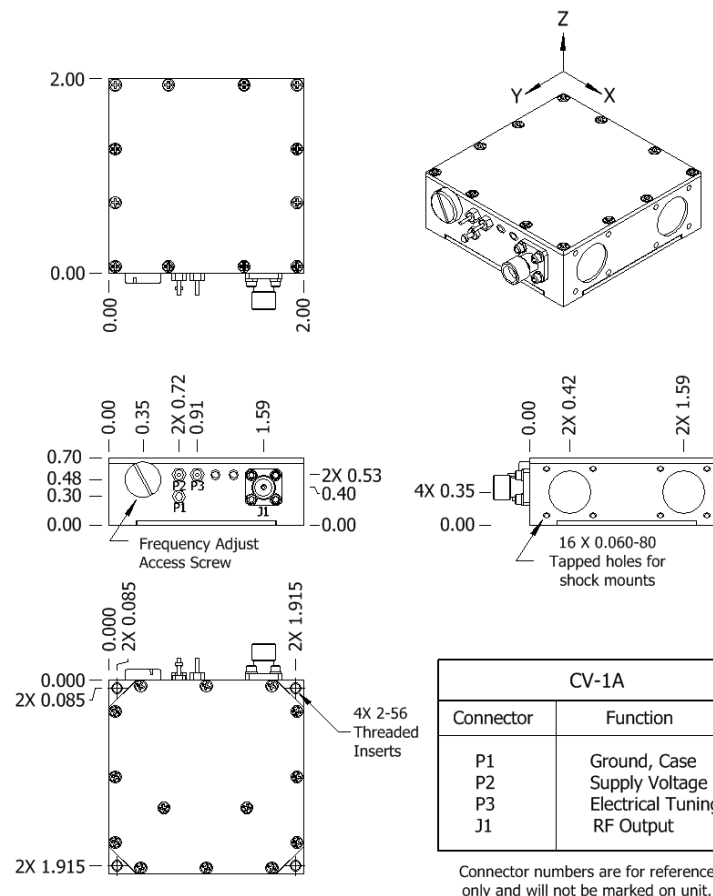

Wenzel Associates, Inc.

Austin, Texas

Title:

Premium 160 MHz-SC Citrine Crystal Oscillator

P/N:

501-26865

Rev:

B

Date:

02-07-19

Drawn:

Ref:

24825
ULN

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

± 0.030 "

0.XXX Dec:

± 0.010 "

FSCM:

62821

Page 1 of 1