

## OUTPUTS

Output	Frequency	Level (into 50Ω)
A	100 MHz	+16 ±2 dBm
B	800 MHz	+16 ±2 dBm

## STABILITY

### Aging

- 1 x 10<sup>-6</sup> first year
- after 30 days operating, typical
- 5 x 10<sup>-7</sup> second year, typical
- 3 x 10<sup>-7</sup> per year thereafter, typical

### Phase Noise L(f), dBc/Hz, typical

	100 MHz	800 MHz
10 Hz	-105	-82
100 Hz	-136	-112
1 kHz	-162	-140
10 kHz	-183	-158
100 kHz	-188	-161

### Temperature Stability

±5 x 10<sup>-7</sup>, 0 to +50°C (Ref. +25°C)

### Harmonics

≤ -25 dBc

### Sub-Harmonics

≤ -60 dBc

### Spurious

≤ -80 dBc, excluding power  
supply line related spurs

## MECHANICAL

### Dimensions

4.21 x 4 x 1"

### Connectors

RF Outputs: SMA(f)  
Power, ET: Feed Thru Terminals  
GND: Ground Turret

### Packaging

Nickel-plated machined  
aluminum housing – G2-03

### Mounting

Threaded inserts on base,  
#2-56, 6 places

## POWER REQUIREMENTS

### Warm-Up Power

≤ 13 Watts for 5 minutes

### Total Power

≤ 9 Watts at +25°C

### Supply Voltage

+15 VDC ±5%

## ADJUSTMENT

### Mechanical Tuning

±4 x 10<sup>-6</sup>

### Electrical Tuning

±5 x 10<sup>-7</sup>, ±5 VDC  
Negative Slope

## CRYSTAL

### Type

100 MHz SC-cut (x8)

## OTHER

### Label

Use conventional label with the  
following information:

501-28306 (Current Rev.)

100M/800M GMXO-FR

+15 VDC


Serial # - Date Code

(Mark connectors with function)

### Test Data

- Output Level
- Phase Noise
- Temperature Stability
- Harmonics, Subs, Spurious
- Power – Warm-up and Total

REV	DATE	REVISION RECORD	DWN	AUTH
-	07-29-14	Initial Release	PAC	

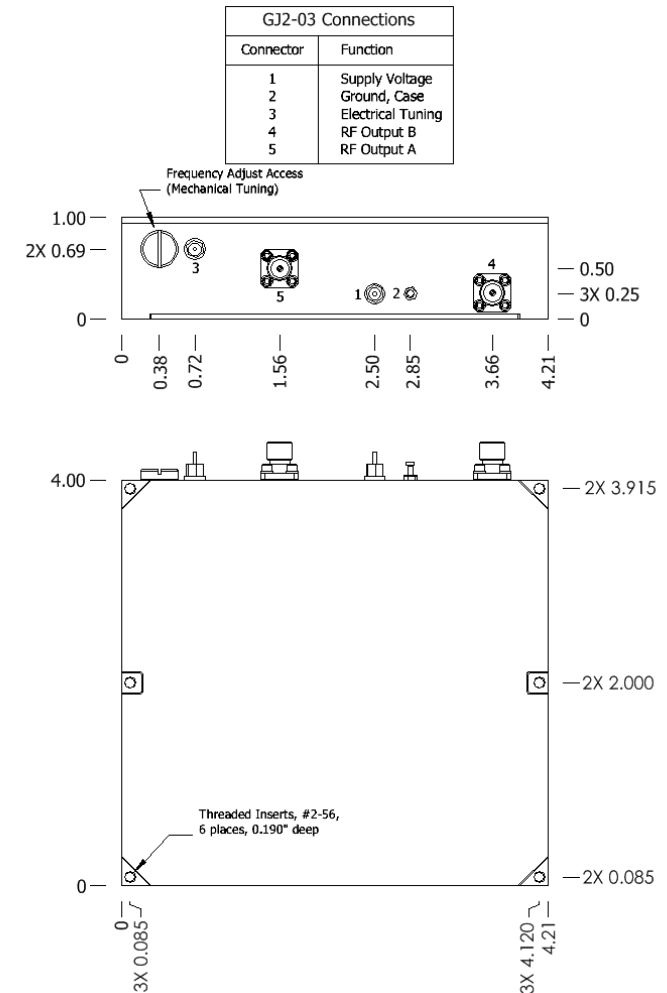

**Wenzel Associates, Inc.**  
Austin, Texas

Title:

**100 MHz & 800 MHz Golden  
Multiplied Crystal Oscillator (GMXO-FR)**

P/N: <b>501-28306</b>	Rev.: <b>-</b>	Date: <b>07-29-14</b>	Drawn:	Ref:
Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: <b>±0.030"</b>	0.XXX Dec: <b>±0.010"</b>	FSCM: <b>62821</b>	Page 1 of 1