

OUTPUTS

Output	Frequency	Level (into 50Ω)
A	80 MHz	+13 ±2 dBm
B	320 MHz	+13 ±2 dBm
C	640 MHz	+13 ±2 dBm

STABILITY

Aging

- 1 x 10⁻⁶ first year
- after 30 days operating, typical
- 5 x 10⁻⁷ second year, typical
- 3 x 10⁻⁷ per year thereafter, typical

Phase Noise L(f), dBc/Hz, typical

	80 MHz	320 MHz	640 MHz
10 Hz	-103	-89	-82
100 Hz	-133	-119	-112
1 kHz	-158	-144	-137
10 kHz	-175	-160	-153
100 kHz	-176	-161	-154

Temperature Stability

- ±5 x 10⁻⁷, 0 to +50°C (Ref. +25°C)

Harmonics

- ≤ -25 dBc

Sub-Harmonics

- ≤ -60 dBc

Spurious

- ≤ -80 dBc, excluding power
- supply line related spurs

MECHANICAL

Dimensions

- 3.21 x 4 x 1"

Connectors

- RF Outputs: SMA(f)
- Power, ET: Feed Thru Terminals
- GND: Ground Turret

Packaging

- Nickel-plated machined
- aluminum housing – J2-023

Mounting

- Threaded inserts on base,
- #2-56, 6 places

POWER REQUIREMENTS

Warm-Up Power

- ≤ 11 Watts for 5 minutes

Total Power

- ≤ 7.5 Watts at +25°C

Supply Voltage

- +15 VDC ±5%

ADJUSTMENT

Mechanical Tuning

- ±4 x 10⁻⁶

Electrical Tuning

- ±5 x 10⁻⁷, ±5 VDC
- Negative Slope

CRYSTAL

Type

- 80 MHz SC-cut (x8)

OTHER


Label

- Use conventional label with the following information:
- 501-28430 (Current Rev.)
- 80/320/640M MXO-FR
- +15 VDC
- Serial # - Date Code
- (Mark connectors with function)

Test Data

- Output Level
- Phase Noise
- Temperature Stability
- Harmonics, Subs, Spurious
- Power – Warm-up and Total

REV	DATE	REVISION RECORD	DWN	AUTH
-	09-18-14	Initial Release	PAC	

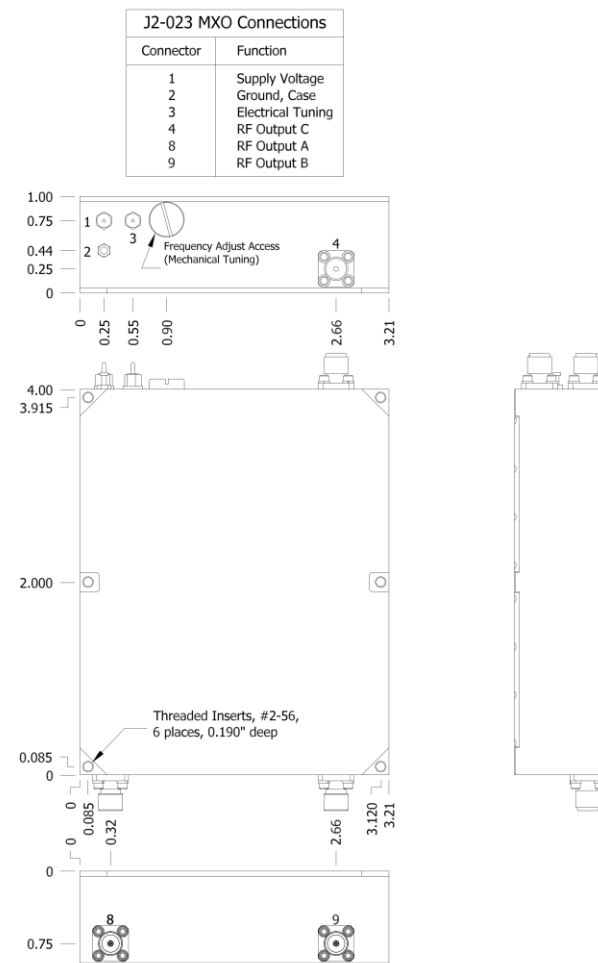

Wenzel Associates, Inc.
Austin, Texas

Title:

**80 MHz, 320 MHz and 640 MHz
Multiplied Crystal Oscillator (MXO-FR)**

P/N:

501-28430

Rev:

-

Date:

09-18-14

Drawn:

Ref:

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

±0.030"

0.XXX Dec:

±0.010"

FSCM:

62821

Page 1 of 1