

## INPUT

### Frequency

10 MHz,  $\pm 2 \times 10^{-6}$

### Level

+7 dBm  $\pm 5$  dB into 50 ohms

## OUTPUT

### Frequency

250 MHz

### Level

+10 dBm  $\pm 2$  dB into 50 ohms

## STABILITY

### Output Phase Noise L(f)

#### (Free-Running)

100 Hz -117 dBc/Hz

1 kHz -144 dBc/Hz

10 kHz -160 dBc/Hz

100 kHz -163 dBc/Hz

### Aging

$\pm 1 \times 10^{-6}$  per year after 30 days  
operating, typical

### Temperature Stability

$\pm 5 \times 10^{-7}$  free-running from 0 to +50°C,  
(Ref. +25°C)

### Phase Lock Alarm

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

### Phase Lock Voltage Monitor

Voltage monitor pin supplied

## SPECTRAL PURITY

### Harmonics

$\leq -30$  dBc

### Sub-Harmonics and products of 125 MHz

$\leq -50$  dBc

### PLL Divider Products

$\leq -60$  dBc

### Spurious

$\leq -70$  dBc

## MECHANICAL

### Dimensions

2.5 x 3.5 x 0.8"

### Connectors

SMA's and solder pins on side

Feed-thru terminals for lock alarm, supply  
and phase lock voltage monitor

## Packaging

Nickel-plated machined  
aluminum housing

## Mounting

Tapped holes on sides, 16 places

Through holes, 4 places

Threaded inserts on base, 4 places

## POWER REQUIREMENTS

### Supply Voltage

+15 VDC  $\pm 5\%$

### Warm-Up Power

$\leq 8$  Watts at start-up for 5 minutes  
at +25°C

### Total Power

$\leq 5$  Watts at steady state +25°C

## ADJUSTMENT

### Loop BW


Target Bandwidth:  $\leq 5$  Hz

Type 2 Loop

## CRYSTAL

### Type

SC-cut at 125 MHz

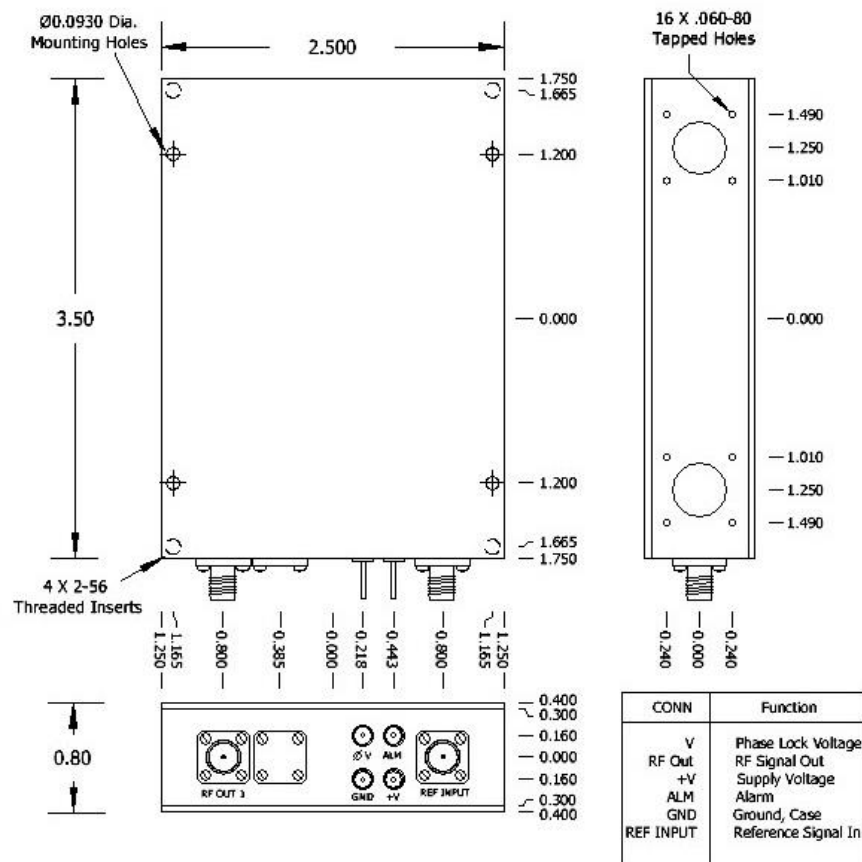

**Wenzel Associates, Inc.**

Austin, Texas

Title:

## 250 MHz-SC Phase Lock Crystal Oscillator

P/N:

**501-28851**

Rev:

**-**

Date:

**03-11-15**

Drawn:

Ref:

501-24057

Tolerances:  
(except as noted)  
Dimensions are in inches

0.XX Dec:

$\pm 0.030$ "

0.XXX Dec:

$\pm 0.010$ "

FSCM:

**62821**

Page 1 of 1