

OUTPUT

Frequency

100 MHz

Sine

+13 dBm ±2 dB into 50 ohms

STABILITY

Aging

±5 x 10⁻⁸ per year, Year 1

±2 x 10⁻⁸ per year, Year 2

±1 x 10⁻⁸ per year, thereafter

Phase Noise L(f)

Static, Sine Output

1 Hz -80 dBc/Hz

10 Hz -110 dBc/Hz

100 Hz -130 dBc/Hz

1 kHz -150 dBc/Hz

10 kHz -173 dBc/Hz

100 kHz -180 dBc/Hz

Short-Term Stability (constant °C)

1e-9, 1 Second

G-Sensitivity

<2e-11 per axis from 4 Hz to 300 Hz

Temperature Stability, typical

< ±1 x 10⁻⁸, +26° to +41 °C (Ref +33 °C)

Normal operating temp, +33 °C

Harmonics,

-30 dBc

Spurious

-110 dBc ±100kHz, Measured to -90 dBc

Load Sensitivity, typical

±10e-9 for 5% change

Line Sensitivity, typical

±10e-9 for 5% change

MECHANICAL

Dimensions

4 x 4.5 x 0.9", with brackets

Connectors

SMA for RF

Miniature Male DB 9 Connector for DC

Packaging

Machined Aluminum enclosure

Weight

0.8 LBS, typical

POWER REQUIREMENTS

Warm-Up Power

≤ 8 Watts for 10 minutes, typical

Total Steady-State Power

6 Watts, typical

Supply Voltage

+12 VDC +5%

ADJUSTMENT

Electrical Tuning Sensitivity

>±6 x 10⁻⁷ min, 0 to +10 VDC,

Electrical Tuning Bandwidth

>100 Hz, Lock below 1 Hz for best performance under vibration

OTHER

Vibration Profile

Vibe Freq Hz (g²/Hz) 0.52 grms

2 .001

4 .001

4 .0018

60 .0018

70 .0001

200 .0001

210 1e-5

10,000 1e-6

Design

Vibration isolation/compensation system for best noise under vibration
Utilizes Bootstrap Technology

Test Data


- Output Level
- Phase Noise
- G-sensitivity in 3 axes
- Temperature Stability
- Short-Term 1 second
- Harmonics, Subs, Products, Spurs
- Power – Warm-up and Total

CRYSTAL

Type

Very low-g sensitivity
10 MHz SC, 100 MHz SC

REV	DATE	REVISION RECORD	DWN	AUTH
-	04-05-15	Draft	Liz	
A	06-02-15	501-designation	Liz	

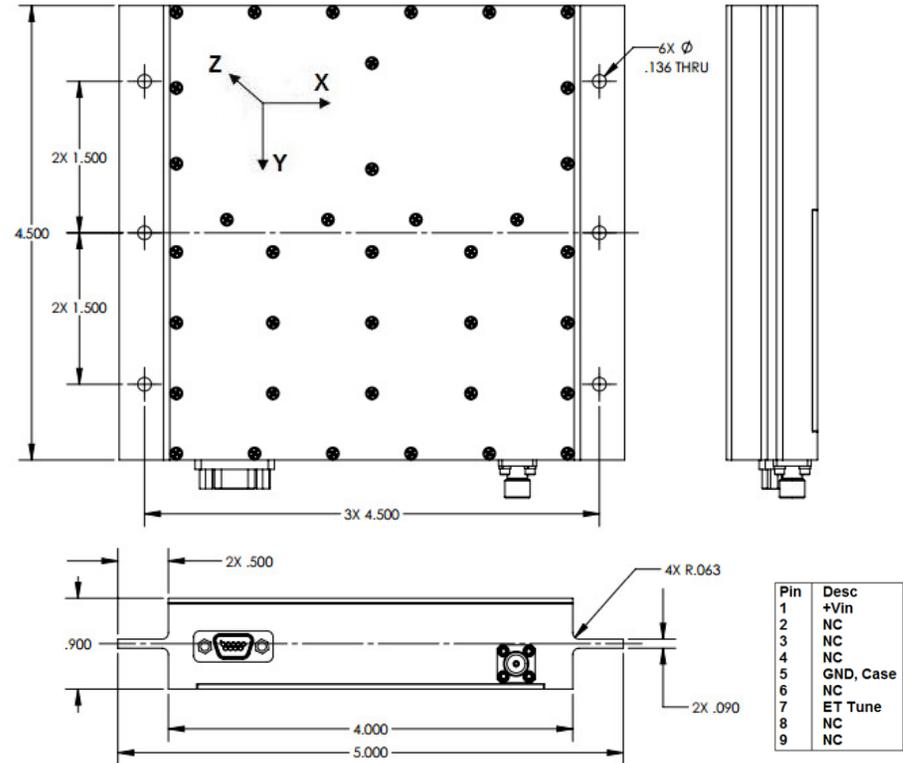

 Wenzel Associates, Inc. Austin, Texas				
Title:				
100 MHz Bootstrap Low Vibration Oscillator				
P/N:	Rev:	Date:	Drawn:	Ref:
501-28979	-	4-05-15		
Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ±0.030"	0.XXX Dec: ±0.010"	FSCM: 62821	Page 1 of 1