

INPUT

Frequency

10 MHz

Level

+7 dBm ± 6 dB into 50 ohms

OUTPUT

Frequency

6.7 GHz

Level

+13 dBm ± 2 dB into 50 ohms

STABILITY

Aging (free-running)

1×10^{-6} first year

after 30 days operating, typical

5×10^{-7} second year, typical

3×10^{-7} per year thereafter, typical

Phase Noise L(f), typical, (free-running)

10 Hz -52 dBc/Hz

100 Hz -84 dBc/Hz

1 KHz -113 dBc/Hz

10 KHz -133 dBc/Hz

100 KHz -134 dBc/Hz

1 MHz -134 dBc/Hz

Temperature Stability

$\pm 5 \times 10^{-7}$ free-running from 0 to +50°C
(Ref. +25°C)

Harmonics

-25 dBc

Sub-Harmonics

-60 dBc

PLL Divider Products

-60 dBc

Spurious

-80 dBc, excluding power
supply line related spurs

Phase Lock Alarm

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

Phase Lock Voltage Monitor

Voltage monitor pin supplied

MECHANICAL

Dimensions

5.36 x 4 x 1"

Connectors

RF Input/Output: SMA(f)

Power, Monitoring: Feed Thru Terminals

GND: Ground Turret

Packaging

Nickel-plated machined
aluminum housing – J3P

Mounting

Threaded inserts on base,
#2-56, 6 places

POWER REQUIREMENTS

Warm-Up Power

≤ 18 Watts for 5 minutes

Total Power

≤ 14.5 Watts at +25°C

Supply Voltage

+15 VDC $\pm 5\%$

ADJUSTMENT

Loop BW

Target Bandwidth: ≤ 10 Hz
Type 2 Loop

CRYSTAL

Type

83.75 MHz SC-cut (x80)

OTHER

Label

Use conventional label with the
following information:

501-29455 (Current Rev.)

6.7 GHz MXO-PLD

+15 VDC

Serial # - Date Code

(Mark connectors with function)


Test Data

- Output Level
- Phase Noise – free-running
- Temperature Stability – free-running
- Harmonics, Subs, Products, Spurious
- Power – Warm-up and Total

REV	DATE	REVISION RECORD	DWN	AUTH
-	10-13-15	Initial Release	PAC	

J3P MXO Connections

Connector	Function
1	Supply Voltage
2	Ground, Case
4	RF Output
5	Phase Lock Voltage
6	Phase Lock Alarm
7	External Reference Input

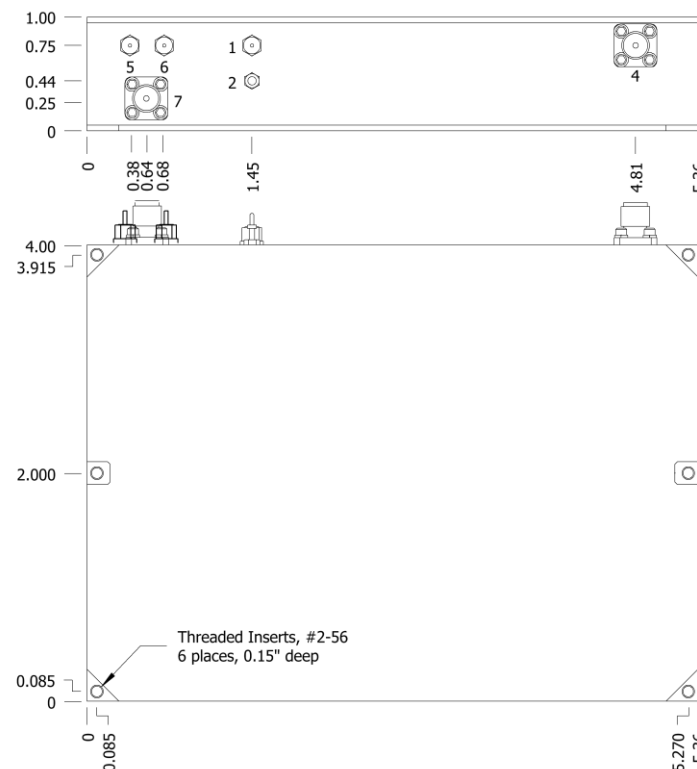

Wenzel Associates, Inc.

Austin, Texas

Title:

6.7 GHz Multiplied Crystal Oscillator (MXO-PLD)

P/N:

501-29455

Rev:

-

Date:

10-13-15

Drawn:

Ref:

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

± 0.030 "

0.XXX Dec:

± 0.010 "

FSCM:

62821

Page 1 of 1