

OUTPUT

Frequency

250 MHz

Level

+13 dBm ± 2 dB into 50 ohms

STABILITY

Aging

1×10^{-6} first year
after 30 days operating, typical
 5×10^{-7} second year, typical
 3×10^{-7} per year thereafter, typical

Phase Noise L(f), Static

100 Hz -122 dBc/Hz
1 kHz -150 dBc/Hz
10 kHz -172 dBc/Hz
100 kHz -176 dBc/Hz

Temperature Stability

$\pm 5 \times 10^{-7}$, 0° to +50°C (Ref +25°C)

Harmonics

≤ -25 dBc

Sub-Harmonics

≤ -50 dBc

Non-Harmonic Spurious

≤ -80 dBc, excluding power
supply line related spurs

MECHANICAL

Dimensions

2" x 2" x 1.3"

Connectors

SMA(f) and solder pins on one side

Packaging

Nickel-plated machined
aluminum housing (CVP-1A)

Mounting

Threaded inserts, # 2-56, 4 places
Tapped holes on sides, 16 places
(provisions for shock mounts)

POWER REQUIREMENTS

Warm-Up Power

≤ 8 Watts for 5 minutes at +25°C

Total Power

≤ 5 Watts at +25°C

Supply Voltage

+15 VDC $\pm 5\%$

ADJUSTMENT

Mechanical Tuning

$\pm 4 \times 10^{-6}$

Electrical Tuning

$\pm 5 \times 10^{-7}$ min, ± 5 VDC

Negative slope

CRYSTAL

Type

125 MHz SC-cut w/ x2 stage

Acceleration Sensitivity

$\leq 5 \times 10^{-10}$ /g per axis, typical

ENVIRONMENTAL

Operating Temperature

0° to +50°C

Storage Temperature

-40° to +85°C

OTHER


Label

Use conventional label with the
following information:
501-29837 (Current Rev.)
250 MHz Golden Citrine
+15 VDC
Serial # - Date Code

Test Data

Output Level
Phase Noise – Static
Temperature Stability
Harmonics, Subs, Spurious
Power - Warm-up and Total
Tuning – MT and ET

REV	DATE	REVISION RECORD	DWN	AUTH
-	03-05-16	Initial Release	Liz	

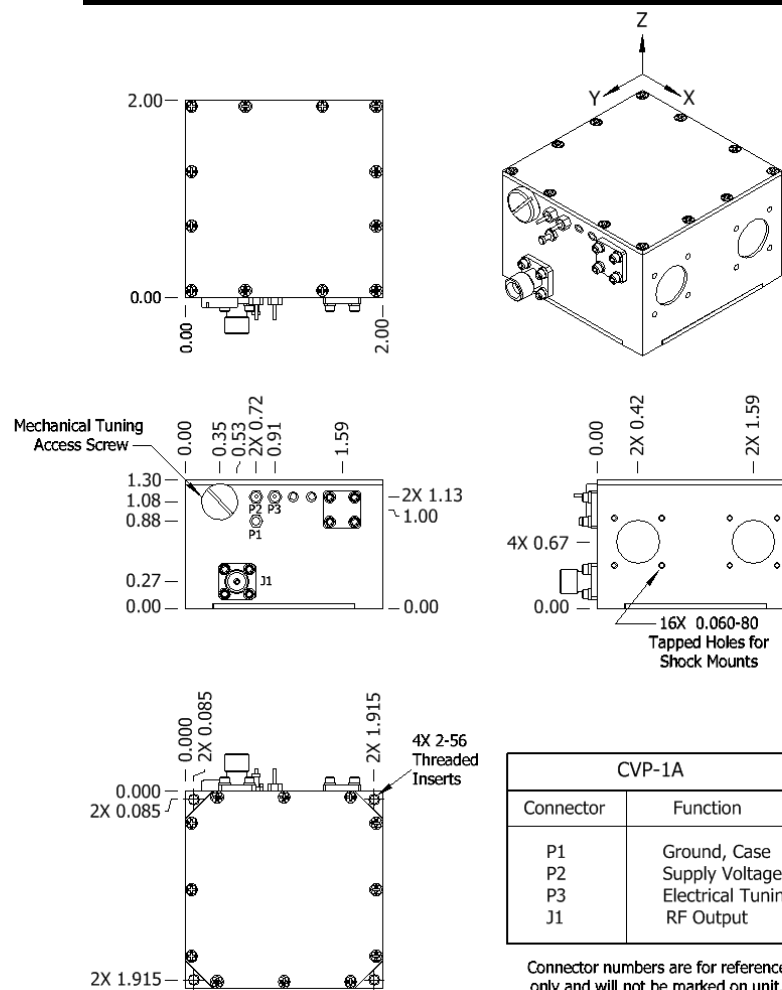

Wenzel Associates, Inc.

Austin, Texas

Title:

Golden 250 MHz Citrine Plus Crystal Oscillator

P/N:

501-29837

Rev:

-

Date:

03-05-16

Drawn:

Ref:

Golden

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

± 0.030 "

0.XXX Dec:

± 0.010 "

FSCM:

62821

Page 1 of 1