

## OUTPUT

### Frequency

80 MHz

### Level

+13 dBm  $\pm$  2 dB into 50 ohms

## STABILITY

### Aging (typical)

$1 \times 10^{-6}$  per year after 30 days operating

$5 \times 10^{-7}$  second year

$3 \times 10^{-7}$  per year, thereafter

### Phase Noise L(f)

100 Hz -120 dBc/Hz

1 kHz -150 dBc/Hz

10 kHz -165 dBc/Hz

100 kHz -165 dBc/Hz

## Temperature Stability

$\pm 2 \times 10^{-7}$ , 0° to +50°C (Ref +25°C)

## Harmonics

$\leq -30$  dBc

## Spurious

$\leq -80$  dBc, excluding power  
supply line related spurs

## MECHANICAL

### Packaging

Solder sealed steel can

### Dimensions

2 x 2 x 0.75"

### Connectors / Mounting

SMA(f) and solder pins on side;  
threaded inserts, #4-40, 2 places

## POWER REQUIREMENTS

### Warm-Up Power

$\leq 5$  Watts for 5 minutes at +25°C

### Total Power

$\leq 2.2$  Watts at +25°C

### Supply Voltage

+15 VDC  $\pm 5\%$

## ADJUSTMENT

### Mechanical Tuning

$\pm 4 \times 10^{-6}$

### Electrical Tuning


$\pm 5 \times 10^{-7}$ ,  $\pm 5$  VDC, Negative slope

## CRYSTAL

### Type

80 MHz SC-cut

REV	DATE	REVISION RECORD	DWN	AUTH
-	04-11-16	Initial Release	BH	

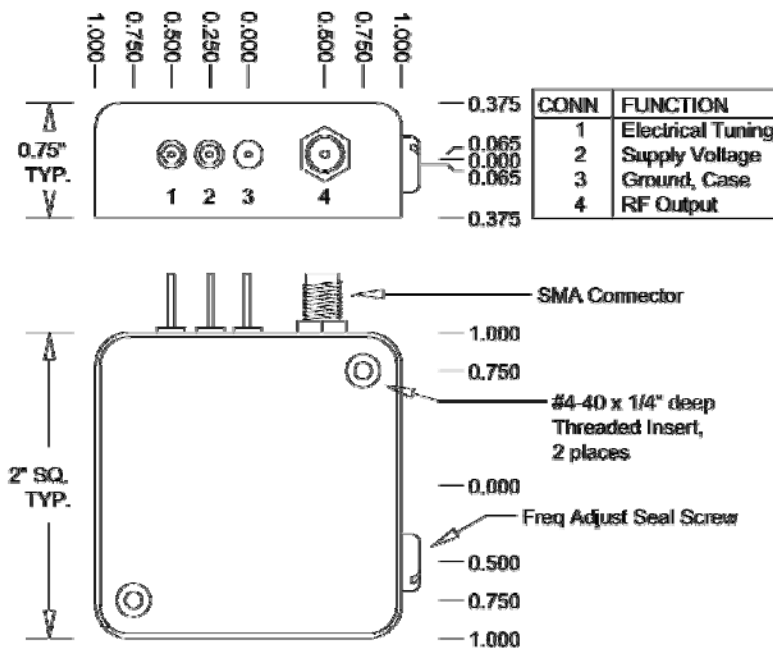

Connector numbers are for reference only,  
they are not marked on unit.



**Wenzel Associates, Inc.**

Austin, Texas

Title:

**Standard 80 MHz-SC Sprinter Crystal Oscillator**

P/N:

**501-29951**

Rev:

**-**

Date:

**04-11-16**

Drawn:

Ref:

Tolerances:  
(except as noted)  
Dimensions are in inches

0.XX Dec:

**$\pm 0.030$ "**

0.XXX Dec:

**$\pm 0.010$ "**

FSCM:

**62821**

Page 1 of 1