

INPUT

Frequency

10 MHz

Level

+13 dBm \pm 1 dB into 50 ohms

OUTPUTS

RF Output	Frequency	Output Level (into 50 ohms)
A	100 MHz	+13 dBm \pm 2 dB
B	700 MHz	+10 dBm \pm 2 dB
C	3.5 GHz	+10 dBm \pm 2 dB
D	7 GHz	+13 dBm \pm 2 dB

STABILITY

Aging (free-running)

1×10^{-6} first year

after 30 days operating, typical

5×10^{-7} second year, typical

3×10^{-7} per year thereafter, typical

Phase Noise L(f), dBc/Hz, typical, (free-running)

	100 MHz	700 MHz	3.5 GHz	7 GHz
10 Hz	-100	-82	-67	-60
100 Hz	-130	-112	-97	-90
1 kHz	-158	-140	-124	-117
10 kHz	-175	-157	-141	-134
100 kHz	-176	-158	-142	-135
1 MHz	-176	-158	-142	-135

Temperature Stability

$\pm 5 \times 10^{-7}$ free-running from 0 to +50°C
(Ref. +25°C)

Harmonics

-25 dBc

Sub-Harmonics

-60 dBc

PLL Reference Products

-60 dBc

Spurious

-80 dBc, excluding power
supply line related spurs

Phase Lock Alarm

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

Phase Lock Voltage Monitor

Voltage monitor pin supplied

MECHANICAL

Dimensions

5.36 x 4 x 1"

Connectors

RF Input/Outputs: SMA(f)

Power, Monitoring: Feed Thru Terminals

GND: Ground Turret

Packaging

Nickel-plated machined

aluminum housing – J2PM-0123

Mounting

Threaded inserts on base,

#2-56, 6 places

POWER REQUIREMENTS

Warm-Up Power

\leq 16 Watts for 5 minutes

Total Power

\leq 13 Watts at +25°C

Supply Voltage

+15 VDC \pm 5%

ADJUSTMENT

Loop BW

Target Bandwidth: ~300 Hz

Type 2 Loop

CRYSTAL

Type

100 MHz SC-cut (x70)

OTHER

Label

Use conventional label with the
following information:

501-30165 (Current Rev.)

100M/700M/3.5G/7G MXO-PLM

+15 VDC

Serial # - Date Code


(Mark connectors with function)

Test Data

- Output Level
- Phase Noise – free-running
- Temperature Stability – free-running
- Harmonics, Subs, Products, Spurious
- Power – Warm-up and Total

REV	DATE	REVISION RECORD	DWN	AUTH
-	07-06-16	Initial Release	PAC	

J2PM-0123 MXO Connections	
Connector	Function
1	Supply Voltage
2	Ground, Case
4	RF Output D
5	Phase Lock Voltage
6	Phase Lock Alarm
7	External Reference Input
8	RF Output A
9	RF Output B
10	RF Output C

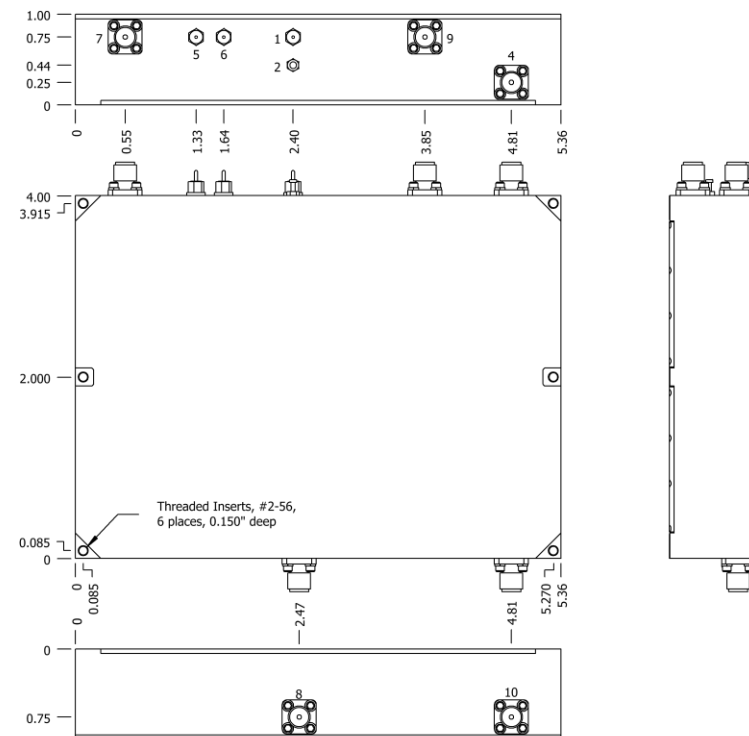

Wenzel Associates, Inc.

Austin, Texas

Title:

**100 MHz, 700 MHz, 3.5 GHz & 7 GHz
Multiplied Crystal Oscillator (MXO-PLD)**

P/N:

501-30165

Rev:

-

Date:

07-06-16

Drawn:

Ref:

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

± 0.030 "

0.XXX Dec:

± 0.010 "

FSCM:

62821

Page 1 of 1