

## OUTPUTS

Output	Frequency	Level (into 50Ω)
A	10 MHz	+13 ±2 dBm
B	10.24 GHz	+13 ±2 dBm

## STABILITY

### Aging

- 1 x 10<sup>-7</sup> first year
- after 30 days operating, typical
- 5 x 10<sup>-8</sup> second year, typical
- 2 x 10<sup>-8</sup> per year thereafter, typical

### Phase Noise L(f), dBc/Hz, typical

	10 MHz	10.24 GHz
10 Hz	-140	-57
100 Hz	-160	-87
1 kHz	-172	-112
10 kHz	-174	-129
100 kHz	-175	-130

### Temperature Stability

±5 x 10<sup>-9</sup>, 0 to +50°C (Ref. +25°C)

### Harmonics

≤ -25 dBc

### Sub-Harmonics

≤ -60 dBc

### PLL Reference Products

≤ -60 dBc

### Spurious

≤ -80 dBc, excluding power  
supply line related spurs

### Phase Lock Alarm

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

### Phase Lock Voltage Monitor

Voltage monitor pin supplied

## MECHANICAL

### Dimensions

7.46 x 4 x 1"

### Connectors

RF Outputs: SMA(f)

Power, Monitoring: Feed Thru Terminals

GND: Ground Turret

## Packaging

Nickel-plated machined  
aluminum housing – J3PMX

## Mounting

Threaded inserts on base,  
#2-56, 11 places

## POWER REQUIREMENTS

### Warm-Up Power

≤ 26.5 Watts for 5 minutes

### Total Power

≤ 19.5 Watts at +25°C

### Supply Voltage

+15 VDC ±5%

## ADJUSTMENT

### Mechanical Tuning (Internal 10 MHz)

±1 x 10<sup>-6</sup>

### Loop BW (Internal 100 MHz PLL)

Target Bandwidth: ~250 Hz

Type 2 Loop

## CRYSTAL

### Type

80 MHz SC-cut (x128)

## OTHER

### Label

Use conventional label with the  
following information:

501-30341 (Current Rev.)

10M/10.24GHz MXO-PLMX

+15 VDC


Serial # - Date Code

(Mark connectors with function)

### Test Data

- Output Level
- Phase Noise
- Temperature Stability
- Harmonics, Subs, Products, Spurs
- Power – Warm-up and Total

REV	DATE	REVISION RECORD	DWN	AUTH
-	09-15-16	Initial Release	CB	

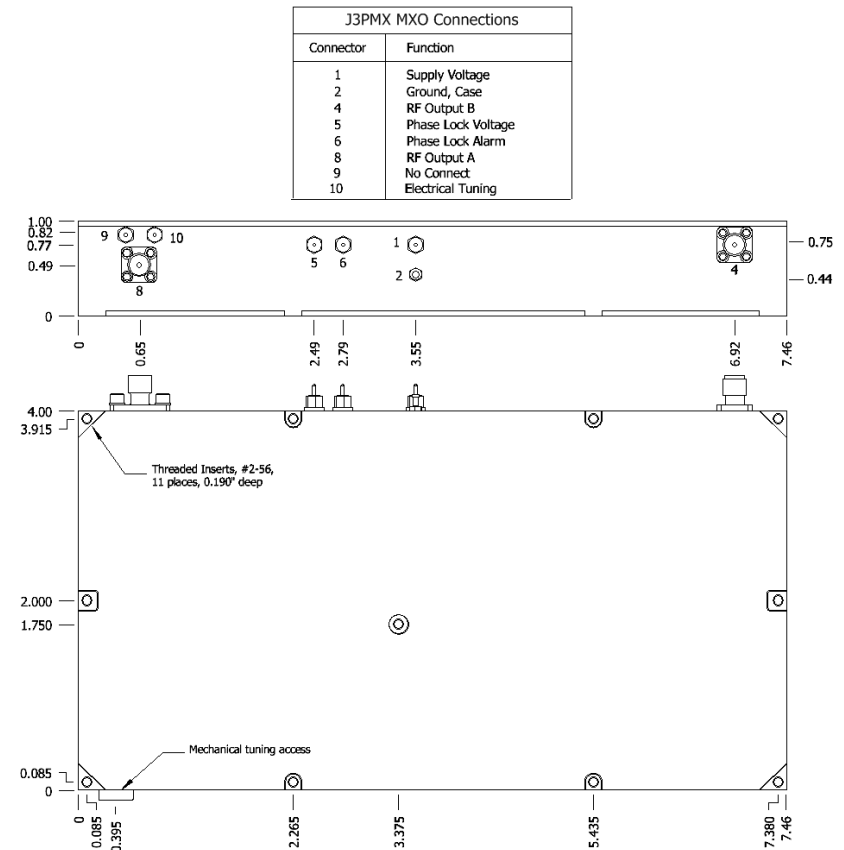

**Wenzel Associates, Inc.**  
Austin, Texas

Title: <b>10 MHz &amp; 10.24 GHz Multiplied Crystal Oscillator (MXO-PLMX)</b>				
P/N: <b>501-30341</b>	Rev: <b>-</b>	Date: <b>09-15-16</b>	Drawn:	Ref:
Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: <b>±0.030"</b>	0.XXX Dec: <b>±0.010"</b>	FSCM: <b>62821</b>	Page 1 of 1