

## INPUT

### Frequency

10 MHz

### Level

+7 dBm  $\pm$ 6 dB into 50 ohms

## OUTPUT

RF Output	Frequency	Output Level (into 50 ohms)
A	100 MHz	+13 dBm $\pm$ 2 dB
B	8 GHz	+13 dBm $\pm$ 2 dB

## STABILITY

### Aging (free-running)

$1 \times 10^{-6}$  first year

after 30 days operating, typical

$5 \times 10^{-7}$  second year, typical

$3 \times 10^{-7}$  per year thereafter, typical

### Phase Noise L(f), typical, (free-running)

	100 MHz	8 GHz
10 Hz	-100	-59
100 Hz	-130	-89
1 kHz	-158	-116
10 kHz	-175	-133
100 kHz	-176	-134
1 MHz	-176	-134
10 MHz	-176	-134

### Temperature Stability

$\pm 5 \times 10^{-7}$  free-running from 0 to +50°C  
(Ref. +25°C)

### Harmonics

-25 dBc

### Sub-Harmonics

-60 dBc

### PLL Divider Products

-60 dBc

### Spurious

-80 dBc, excluding power  
supply line related spurs

### Phase Lock Alarm

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

### Phase Lock Voltage Monitor

Voltage monitor pin supplied

## MECHANICAL

### Dimensions

5.36 x 4 x 1"

### Connectors

RF Input/Output: SMA(f)

Power, Monitoring: Feed Thru Terminals

GND: Ground Turret

### Packaging

Nickel-plated machined  
aluminum housing – J3P-05

### Mounting

Threaded inserts on base,  
#2-56, 6 places

## POWER REQUIREMENTS

### Warm-Up Power

$\leq$  17 Watts for 5 minutes

### Total Power

$\leq$  13.5 Watts at +25°C

### Supply Voltage

+15 VDC  $\pm$ 5%

## ADJUSTMENT

### Loop BW

Target Bandwidth:  $\leq$  10 Hz  
Type 2 Loop

## CRYSTAL

### Type

100 MHz SC-cut (x80)

## OTHER

### Label

Use conventional label with the  
following information:

501-30606 (Current Rev.)

100M/8G MXO-PLD

+15 VDC

Serial # - Date Code


(Mark connectors with function)

### Test Data

- Output Level
- Phase Noise – free-running
- Temperature Stability – free-running
- Harmonics, Subs, Products, Spurious
- Power – Warm-up and Total

REV	DATE	REVISION RECORD	DWN	AUTH
-	01-20-17	Initial Release	CB	

J3P-05 MXO Connections	
Connector	Function
1	Supply Voltage
2	Ground, Case
4	RF Output B
5	Phase Lock Voltage
6	Phase Lock Alarm
7	External Reference Input
8	RF Output A

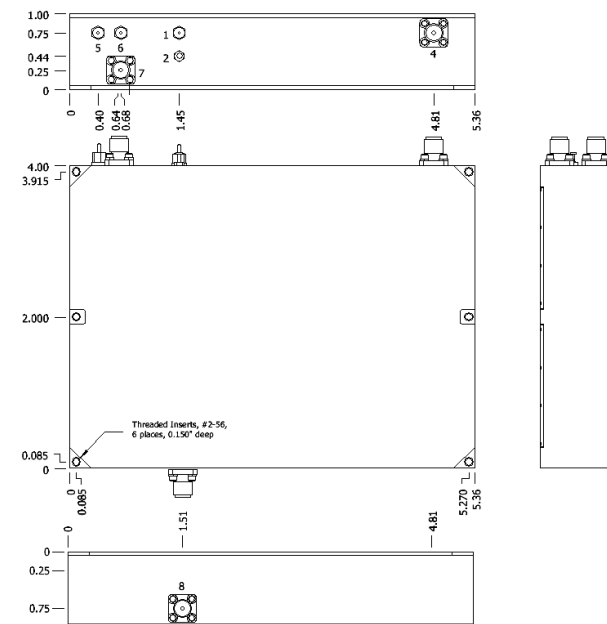

**Wenzel Associates, Inc.**

Austin, Texas

Title:

**100M/8G Multiplied Crystal Oscillator (MXO-PLD)**

P/N:

**501-30606**

Rev:

**-**

Date:

**01-20-17**

Drawn:

Ref:

Tolerances:  
(except as noted)  
Dimensions are in inches

0.XX Dec:

**$\pm 0.030$ "**

0.XXX Dec:

**$\pm 0.010$ "**

FSCM:

**62821**

Page 1 of 1