

**OUTPUT****Frequency**

50 MHz

**Level**

+13 ±2dBm into 50 ohms

**STABILITY****Aging**

1 x 10<sup>-6</sup> per year  
after 30 days operating, typical

**Phase Noise L(f)**

100 Hz -130 dBc  
1 KHz -160 dBc  
10 KHz -174 dBc  
20 KHz -174 dBc

**Temperature Stability**±5 x 10<sup>-7</sup>, 0° to +50°C (Ref +25°C)**MECHANICAL****Dimensions**

1.75 x 2.94 x 1"

**Connectors**

SMA on side and solder pins on base

**Packaging**

Solder sealed steel can

**POWER REQUIREMENTS****Warm-Up Power**

5 Watts for 5 minutes

**Total Power**

2.5 Watts at +25°C

**Supply Voltage**

+15 VDC

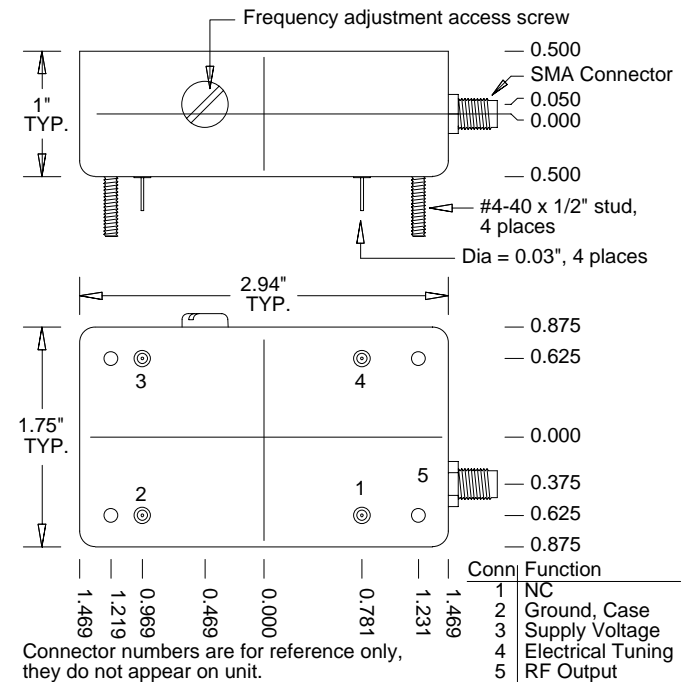
**ADJUSTMENT****Mechanical Tuning**±4 x 10<sup>-6</sup>**Electrical Tuning**

±2 x 10<sup>-7</sup>, ±5 VDC  
Negative slope

**CRYSTAL****Type**

50 MHz SC-cut

REV	DATE	REVISION RECORD	DWN	AUTH
-	03-20-95	Draft	BH	
A	10-29-99	Tuning Hole	KP	BH
B	01-19-00	Correct ET on Drawing	KP	KW
C	02-11-00	Correct Drawing	KP	KW
D	03-20-02	Change Phase Noise	PC	BH
E	04-04-03	Phase Noise	SS	

**Wenzel Associates, Inc.**

Austin, Texas

Title:

**Standard 50 MHz-SC Ultra Low Noise Crystal Osc.**

P/N:

**501-04618**

Rev:

**E**

Date:

**04-04-03**

Drawn:

Ref:

Tolerances:  
(except as noted)  
Dimensions are in inches0.XX Dec:  
**±0.030"**0.XXX Dec:  
**±0.010"**FSCM:  
**62821**Page **1** of **1**