

### LOW NOISE CRYSTAL OSCILLATORS > HF ULN

#### FEATURES:

- Frequencies: 5 MHz to 25 MHz, fixed
- Ultra Low Phase Noise
- Excellent Temperature Stability
- Low Aging Rate
- Internal Voltage Regulator

#### APPLICATIONS:


- Reference Oscillator
- Synthesizers
- Radar Systems
- Test Equipment



#### DESCRIPTION:


The HF Ultra Low Noise oscillator provides excellent temperature stability, ultra-low phase noise performance and good overall short term stability. The HF ULN phase noise performance has been verified by NIST with noise floors to -180 dBc/Hz, although typical performance is specified as low as -176 dBc/Hz. The 5 MHz model is available with temperature stability to  $\pm 1E-8$  over the 0 to +50°C temperature range and an aging rate as low as  $1E-10$  per day. A low noise internal voltage regulator is included, which provides excellent power supply line rejection. Please consult the factory to discuss any custom specification modifications which may better suit your application.

Electrical Specifications	
Output Frequency (fixed; specify within range)	5 MHz to 25 MHz
Output Level	+13 dBm $\pm 2$ dB into 50 ohms
Aging	(10 MHz model, typical)
Per day after 30 days operating, typical	$5 \times 10^{-10}$
Second year, typical	$5 \times 10^{-8}$
Per year thereafter, typical	$3 \times 10^{-8}$
Temperature Stability (consult factory for other ranges)	(10 MHz model, typical)
Range E: 0 to +50°C (Ref: +25°C)	$\leq \pm 2 \times 10^{-8}$
Range F: -20 to +70°C (Ref: +25°C)	$\leq \pm 5 \times 10^{-8}$
Phase Noise	(Frequency Dependent: See Std. Specifications and Part Numbers table below for details)
Harmonics	$\leq -30$ dBc
Spurious	$\leq -80$ dBc
Tuning	(MT and ET ranges can be reversed upon request)
- Mechanical Tuning	$\geq \pm 1 \times 10^{-6}$ , typical
- Electrical Tuning	$\geq \pm 2 \times 10^{-7}$ , typical
Tuning A: 0 to +10 VDC	$\geq \pm 2 \times 10^{-7}$ , typical
Tuning B: $\pm 5$ VDC	(Positive Slope available on some ET only models)
Slope: Negative	
Supply Voltage	+15 VDC or +12 VDC ( $\pm 5\%$ )
Warm-up	$\leq 5$ Watts for 5 minutes at +25°C
Total	$\leq 2.5$ Watts at +25°C
Crystal Type	SC-cut
Mechanical	
Packaging	Solder sealed steel can
Dimensions	1.75" x 2.94" x 1"
Connectors / Mounting	SMA(f) and solder pins on side Threaded Inserts, #4-40, 4 places

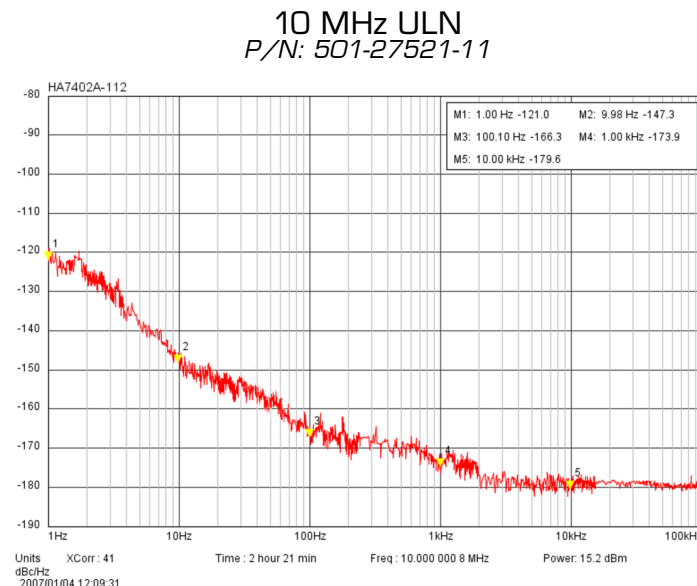



LOW NOISE CRYSTAL OSCILLATORS > HF ULN

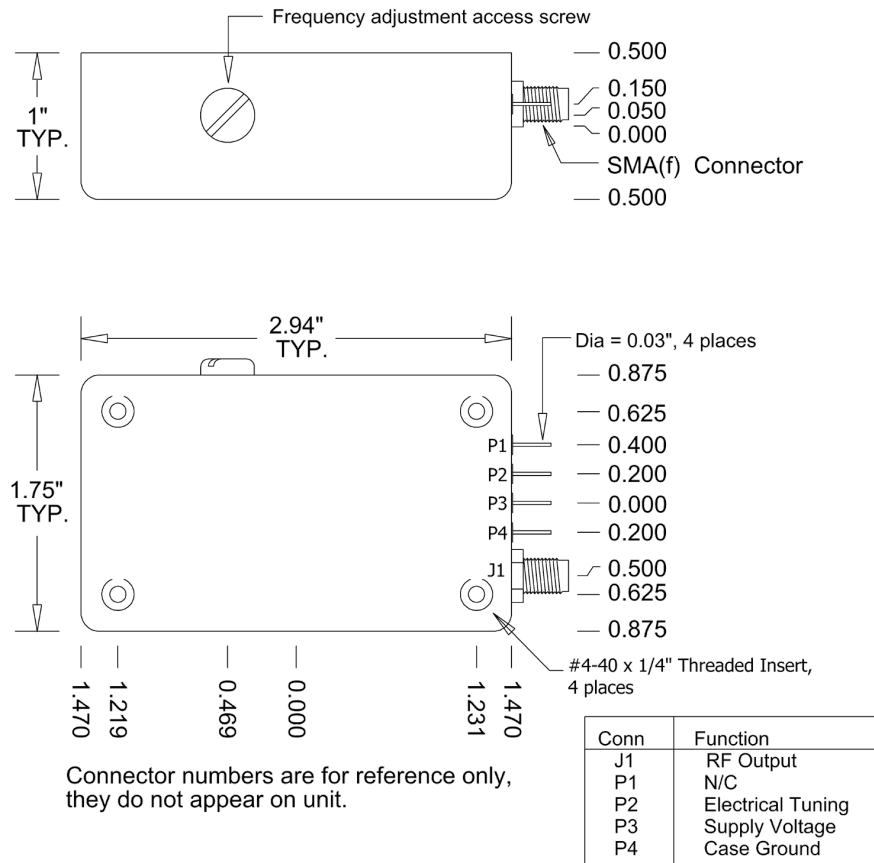

Standard Specifications and Part Numbers \*\*

Part Number	Output Frequency * (MHz)	Typical Phase Noise (dBc/Hz), Static *					Output Level (dBm) * into 50 ohms	Temperature Stability (Ref: +25°C) *	Supply Voltage (VDC)	Package / Connectors	Package Size (inches)
		10 Hz	100 Hz	1 kHz	10 kHz	100 kHz					
501-27520-01	5	-145	-165	-174	-174	-174	+13 ±2	±2E-8, 0° to +50°C	+15	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27520-02	5	-145	-165	-174	-174	-174	+13 ±2	±5E-8, -20° to +70°C	+15	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27520-11	5	-150	-170	-176	-176	-176	+13 ±2	±2E-8, 0° to +50°C	+15	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27520-12	5	-150	-170	-176	-176	-176	+13 ±2	±5E-8, -20° to +70°C	+15	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27520-21	5	-145	-165	-174	-174	-174	+13 ±2	±2E-8, 0° to +50°C	+12	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27520-31	5	-150	-170	-176	-176	-176	+13 ±2	±2E-8, 0° to +50°C	+12	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27521-01	10	-137	-162	-172	-174	-174	+13 ±2	±2E-8, 0° to +50°C	+15	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27521-02	10	-137	-162	-172	-174	-174	+13 ±2	±5E-8, -20° to +70°C	+15	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27521-11	10	-142	-167	-175	-176	-176	+13 ±2	±2E-8, 0° to +50°C	+15	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27521-12	10	-142	-167	-175	-176	-176	+13 ±2	±5E-8, -20° to +70°C	+15	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27521-21	10	-137	-162	-172	-174	-174	+13 ±2	±2E-8, 0° to +50°C	+12	SMA(f) & Pins on Side	1.75 x 2.94 x 1
501-27521-31	10	-142	-167	-175	-176	-176	+13 ±2	±2E-8, 0° to +50°C	+12	SMA(f) & Pins on Side	1.75 x 2.94 x 1

\* Consult factory for custom frequency, phase noise performance, output level, temperature stability and acceleration sensitivity options.  
 \*\* See website for additional Standard Specifications and Part Numbers.