



Blue Tops RF Modules > Low Noise Distribution Amplifier (10-Way)

Features:



- 5 MHz and 10 MHz Standard
- Ultra Low Phase Noise
- Ten Isolated Outputs
- Output Levels to +16 dBm
- Integral Voltage Regulator

Applications:

- Frequency Distribution
- ULN Signal Distribution
- RF Systems Component


Description:

The LNDA-10 is a high performance 10-way frequency distribution amplifier designed to distribute HF ULN crystal oscillator or other low phase noise source signals and features a phase noise floor as low as -178 dBc/Hz intrinsic at the 100 kHz offset. The distribution amplifier operates on +15 VDC and includes a low noise voltage regulator for excellent power supply line rejection.

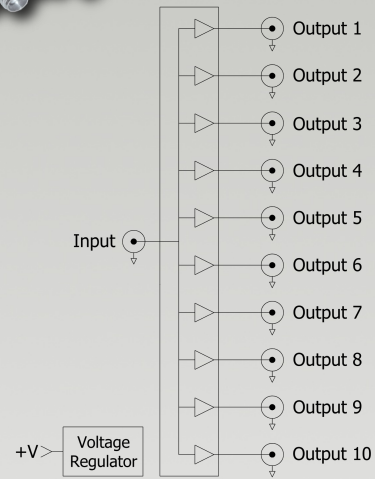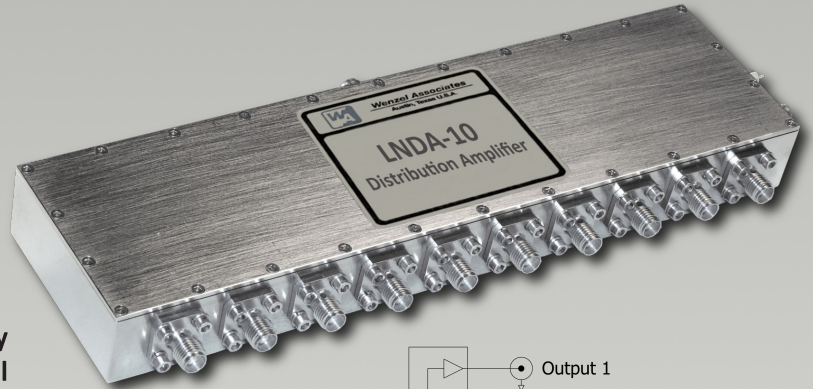

Electrical Specifications	
Frequency	5 or 10 MHz
Input Signal Level	+10 to +13 dBm
Conversion Gain	
- Standard (Low Source Impedance)	+3 ±1.5 dB
- Optional (50 ohm Source Impedance)	0 ±1.5 dB
Phase Noise (Input Referred)	
(5 MHz, +13 dBm):	10 Hz to -150 dBc/Hz
Noise Floor, 100 kHz	to -178 dBc/Hz
Harmonics	≤ -30 dBc
Input VSWR	≤ 2.0:1
Port-to-Port Isolation	≥ 50 dB
Supply Voltage	+15 VDC ±5%
Current Draw, Max	≤ 325 mA
Mechanical	
Dimensions	7.375" x 2" x 0.8"
DC Supply	Feed Thru Capacitors
Ground	Turret Terminal
RF Input / Output	SMA female *
* SMA female connectors are used unless otherwise specified. Other options include SMA male, right angle SMAs, BNC male or female and others. Contact factory for custom configurations.	

Ordering Information:

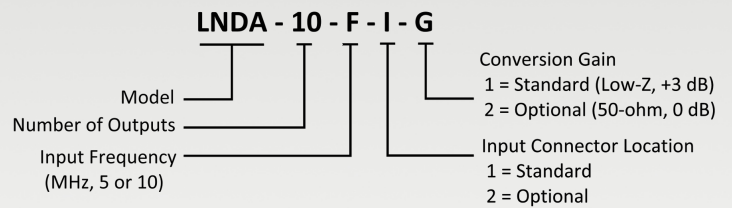

Standard P/N	Number of Outputs	Input Frequency	Input Connector Location	Input Level	Output Level (each port)	Input Referred Residual Phase Noise (100 kHz offset)
LNDA-10-5-1-1	10	5 MHz	Standard	+13 dBm, typ	+16 dBm (Low-Z)	≤ -178 dBc/Hz
LNDA-10-5-1-2	10	5 MHz	Standard	+13 dBm, typ	+13 dBm (50 ohm)	≤ -178 dBc/Hz
LNDA-10-10-1-1	10	10 MHz	Standard	+13 dBm, typ	+16 dBm (Low-Z)	≤ -176 dBc/Hz
LNDA-10-10-1-2	10	10 MHz	Standard	+13 dBm, typ	+13 dBm (50 ohm)	≤ -176 dBc/Hz
LNDA-10-10-2-1	10	10 MHz	Optional	+13 dBm, typ	+16 dBm (Low-Z)	≤ -176 dBc/Hz
LNDA-10-10-2-2	10	10 MHz	Optional	+13 dBm, typ	+13 dBm (50 ohm)	≤ -176 dBc/Hz



Blue Tops RF Modules > Low Noise Distribution Amplifier (10-Way)

Connections	Function
P1	Supply Voltage
P2	Ground, Case
J1	RF Input
J2	RF Output 1
J3	RF Output 2
J4	RF Output 3
J5	RF Output 4
J6	RF Output 5
J7	RF Output 6
J8	RF Output 7
J9	RF Output 8
J10	RF Output 9
J11	RF Output 10

