

LOW NOISE CRYSTAL OSCILLATORS > SPRINTER

FEATURES:

- Frequency: 25 MHz to 130 MHz, fixed
- Low Phase Noise
- Good Temperature Stability
- PCB Mount and SMA Packages
- Internal Voltage Regulator

APPLICATIONS:

- General Purpose Reference
- Portable Transceivers
- Test Equipment
- Synthesizers
- Base Stations




DESCRIPTION:

The Sprinter oscillators are general purpose OCXOs with a fixed output frequency between 25 MHz and 130 MHz, which offer excellent overall performance at a modest cost. They provide good frequency stability over temperature and phase noise floor performance to -167 cBc/Hz. Connector options include PCB mount with solder pins on the base or SMA(f) connector and solder pins on the side. A low noise voltage regulator is included to minimize power supply line related spurious signals. Please contact technical staff to discuss custom requirements.

Electrical Specifications	
Output Frequency (fixed; specify within range)	25 MHz to 130 MHz
Output Level	+13 dBm ±2 dB into 50 ohms
Aging	
Per day after 30 days operating, typical	5×10^{-9}
Second year, typical	5×10^{-7}
Per year thereafter, typical	3×10^{-7}
Temperature Stability (consult factory for other ranges)	(100 MHz model, typical)
Range E: 0 to +50°C (Ref: +25°C)	$\leq \pm 2 \times 10^{-7}$
Range F: -20 to +70°C (Ref: +25°C)	$\leq \pm 5 \times 10^{-7}$
Range G: -55 to +85°C (Ref: +25°C)	$\leq \pm 2 \times 10^{-6}$
Phase Noise	(Frequency Dependent: See Standard Specifications and Part Numbers table below for details)
Harmonics	≤ -30 dBc
Spurious	≤ -80 dBc
Tuning	(MT and ET ranges can be reversed upon request)
- Mechanical Tuning	$\geq \pm 4 \times 10^{-6}$, typical
- Electrical Tuning	$\geq \pm 5 \times 10^{-7}$, typical
Tuning A: 0 to +10 VDC	$\geq \pm 5 \times 10^{-7}$, typical
Tuning B: ±5 VDC	$\geq \pm 5 \times 10^{-7}$, typical
Slope: Negative	(Positive Slope available on some ET only models)
Supply Voltage	+15 VDC or +12 VDC (±5%)
Warm-up	≤ 5 Watts for 5 minutes at +25°C
Total	≤ 2.2 Watts at +25°C
Crystal Type	SC-cut
Mechanical	
Packaging	Solder sealed steel can
Dimensions	2" x 2" x 0.75"
Connectors / Mounting	- Package A SMA(f) and solder pins on side Threaded Inserts, #4-40, 2 places
	- Package B Solder pins on base Thru Hole PCB mount


Premium 100 MHz Sprinter
P/N: 501-27514-11

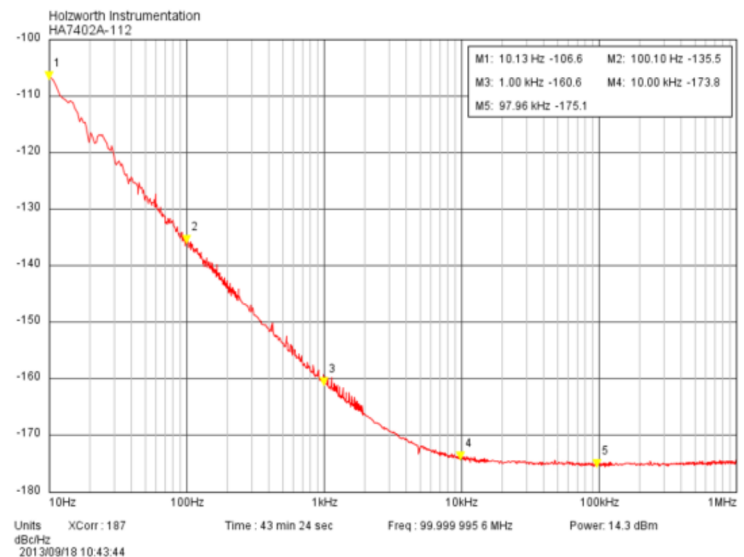




LOW NOISE CRYSTAL OSCILLATORS > SPRINTER

PACKAGE A

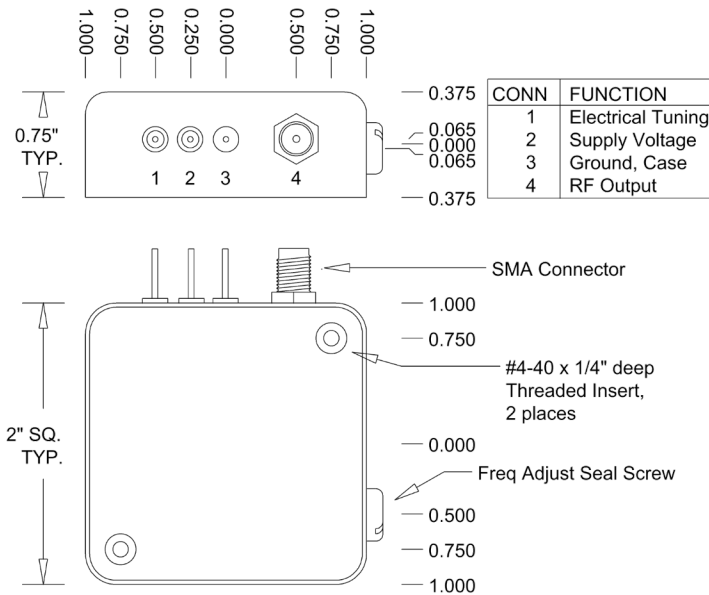

Connector numbers are for reference only, they are not marked on unit.

PACKAGE B

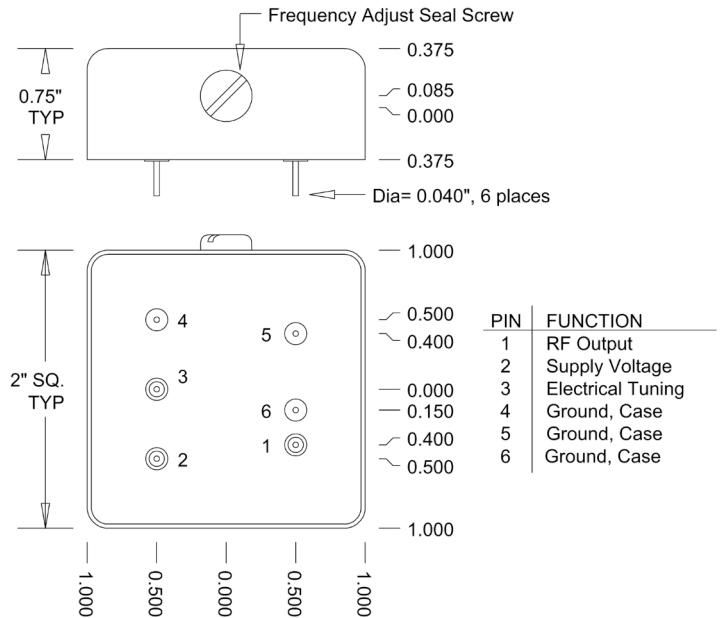

Connector numbers are for reference only, they are not marked on unit.

Standard Specifications and Part Numbers **

Part Number	Output Frequency * (MHz)	Typical Phase Noise [dBc/Hz], Static *					Output Level * (dBm) into 50 ohms	Temperature Stability * (Ref: +25°C)	Supply Voltage (VDC)	Package / Connectors	Package Size (inches)
		10 Hz	100 Hz	1 kHz	10 kHz	100 kHz					
501-27513-01	50	-100	-130	-155	-165	-165	+13 ±2	±2E-7, 0° to +50°C	+15	SMA(f) & Pins on Side	2 x 2 x 0.75
501-27513-04	50	-100	-130	-155	-165	-165	+13 ±2	±2E-7, 0° to +50°C	+15	Solder Pins on Base	2 x 2 x 0.75
501-27513-11	50	-105	-135	-158	-165	-167	+13 ±2	±2E-7, 0° to +50°C	+15	SMA(f) & Pins on Side	2 x 2 x 0.75
501-27513-14	50	-105	-135	-158	-165	-167	+13 ±2	±2E-7, 0° to +50°C	+15	Solder Pins on Base	2 x 2 x 0.75
501-27513-21	50	-100	-130	-155	-165	-165	+13 ±2	±2E-7, 0° to +50°C	+12	SMA(f) & Pins on Side	2 x 2 x 0.75
501-27513-24	50	-100	-130	-155	-165	-165	+13 ±2	±2E-7, 0° to +50°C	+12	Solder Pins on Base	2 x 2 x 0.75
501-27513-31	50	-105	-135	-158	-165	-167	+13 ±2	±2E-7, 0° to +50°C	+12	SMA(f) & Pins on Side	2 x 2 x 0.75
501-27513-34	50	-105	-135	-158	-165	-167	+13 ±2	±2E-7, 0° to +50°C	+12	Solder Pins on Base	2 x 2 x 0.75
501-27514-01	100	-90	-120	-150	-165	-165	+13 ±2	±2E-7, 0° to +50°C	+15	SMA(f) & Pins on Side	2 x 2 x 0.75
501-27514-04	100	-90	-120	-150	-165	-165	+13 ±2	±2E-7, 0° to +50°C	+15	Solder Pins on Base	2 x 2 x 0.75
501-27514-11	100	-100	-130	-155	-165	-167	+13 ±2	±2E-7, 0° to +50°C	+15	SMA(f) & Pins on Side	2 x 2 x 0.75
501-27514-14	100	-100	-130	-155	-165	-167	+13 ±2	±2E-7, 0° to +50°C	+15	Solder Pins on Base	2 x 2 x 0.75
501-27514-21	100	-90	-120	-150	-165	-165	+13 ±2	±2E-7, 0° to +50°C	+12	SMA(f) & Pins on Side	2 x 2 x 0.75
501-27514-24	100	-90	-120	-150	-165	-165	+13 ±2	±2E-7, 0° to +50°C	+12	Solder Pins on Base	2 x 2 x 0.75
501-27514-31	100	-100	-130	-155	-165	-167	+13 ±2	±2E-7, 0° to +50°C	+12	SMA(f) & Pins on Side	2 x 2 x 0.75
501-27514-34	100	-100	-130	-155	-165	-167	+13 ±2	±2E-7, 0° to +50°C	+12	Solder Pins on Base	2 x 2 x 0.75

* Consult factory for custom frequency, phase noise performance, output level and temperature stability options.

** See website for additional Standard Sp.