

EXTERNAL REFERENCE INPUT**Frequency**

10 MHz

Level

+7 dBm ±6 dB into 50 ohms

OUTPUT**Frequency**

10 MHz

Level

A: +13 dBm ±2 dB (± 3 dB *) into 50 ohms

B: +10 dBm ±2 dB (± 3 dB *) into 50 ohms,
each output**STABILITY, free running****Aging** 5×10^{-10} /day after 24 hours operating 5×10^{-8} /year, second year, typical 3×10^{-8} per year, thereafter**Phase Noise L(f)**

	Standard	Premium
10 Hz	-135 dBc/Hz	-140 dBc/Hz
100 Hz	-157 dBc/Hz	-160 dBc/Hz
1 kHz	-169 dBc/Hz	-172 dBc/Hz
10 kHz	-172 dBc/Hz	-174 dBc/Hz

Temperature StabilityE: ±5 x 10⁻⁹, 0° to +50°C (Ref +25°C)F: ±1 x 10⁻⁸, -20° to +70°C (Ref +25°C)G*: ±1 x 10⁻⁷, -55° to +85°C (Ref +25°C)**SPECTRAL PURITY****Harmonics**

≤ -30 dBc

PLL Divider Products

≤ -50 dBc

Non-Harmonic Spurious≤ -80 dBc, excluding power
supply line related spurs**MECHANICAL****Packaging**

Nickel-Plated Machined Aluminum Case

Dimensions

2.5" x 3.5" x 0.8"

A: Single Output

B: Dual output

Connectors

RF Input/Output: SMA(f)

Power, Monitoring: Feed Thru Terminals

GND: Ground Turret

POWER REQUIREMENTS**Supply Voltage**

+15 VDC ±5% or +12 VDC ±5%

Warm-Up Power

≤ 6 Watts for 5 minutes at +25°C

G* ≤ 8 Watts for 5 minutes at +25°C

Total Power

≤ 2.5 Watts at +25°C

G* ≤ 4 Watts at +25°C

ADJUSTMENT**Loop BW**

Type 2 Loop

Target Bandwidth: ≤ 1 Hz

CRYSTAL**Type**

10 MHz SC-cut

Acceleration Sensitivity

Select desired g-sensitivity:

5: 5e-10 per g, per axis typical

3: 3e-10 per g, per axis guaranteed

2: 2e-10 per g, per axis guaranteed

^For 1e-10 per g, per axis option,

see P/N: 501-27601-xx

PHASE LOCK STATUS**Phase Lock Alarm (ALM)**

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

Phase Voltage Monitor (ΦV)

Electrical tuning monitor pin provided

REV	DATE	REVISION RECORD	DWN	AUTH
-	03-19-14	Initial Release	CB	PAC
A	01-13-15	10 Hz Phase Noise offsets	BH	VG

Wenzel Associates, Inc.

Austin, Texas

Title:

**10 MHz-SC Phase Lock Crystal Oscillator V2
(LBW=1Hz)**

P/N:

501-27592-xx

Rev:

A

Date:

01-13-15

Drawn:

Ref:

ULN

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

±0.030"

0.XXX Dec:

±0.010"

FSCM:

62821

Page 1 of 3

Ordering Options

-xx	G-Sensitivity	Voltage	Phase Noise L(f)	Package	Temp (Ref +25 °C)
01	5	+15V	Standard	A	E
02	5	+15V	Standard	A	F
03	5	+15V	Standard	A	G
05	5	+15V	Standard	B	E
06	5	+15V	Standard	B	F
07	5	+15V	Standard	B	G
11	5	+15V	Premium	A	E
12	5	+15V	Premium	A	F
13	5	+15V	Premium	A	G
15	5	+15V	Premium	B	E
16	5	+15V	Premium	B	F
17	5	+15V	Premium	B	G
21	5	+12V	Standard	A	E
22	5	+12V	Standard	A	F
23	5	+12V	Standard	A	G
25	5	+12V	Standard	B	E
26	5	+12V	Standard	B	F
27	5	+12V	Standard	B	G
31	5	+12V	Premium	A	E
32	5	+12V	Premium	A	F
33	5	+12V	Premium	A	G
35	5	+12V	Premium	B	E
36	5	+12V	Premium	B	F
37	5	+12V	Premium	B	G



-xx	G-Sensitivity	Voltage	Phase Noise L(f)	Package	Temp (Ref +25 °C)
41	3	+15V	Standard	A	E
42	3	+15V	Standard	A	F
43	3	+15V	Standard	A	G
45	3	+15V	Standard	B	E
46	3	+15V	Standard	B	F
47	3	+15V	Standard	B	G
51	3	+15V	Premium	A	E
52	3	+15V	Premium	A	F
53	3	+15V	Premium	A	G
55	3	+15V	Premium	B	E
56	3	+15V	Premium	B	F
57	3	+15V	Premium	B	G
61	3	+12V	Standard	A	E
62	3	+12V	Standard	A	F
63	3	+12V	Standard	A	G
65	3	+12V	Standard	B	E
66	3	+12V	Standard	B	F
67	3	+12V	Standard	B	G
71	3	+12V	Premium	A	E
72	3	+12V	Premium	A	F
73	3	+12V	Premium	A	G
75	3	+12V	Premium	B	E
76	3	+12V	Premium	B	F
77	3	+12V	Premium	B	G

-xx	G-Sensitivity	Voltage	Phase Noise L(f)	Package	Temp (Ref +25 °C)
81	2	+15V	Standard	A	E
82	2	+15V	Standard	A	F
83	2	+15V	Standard	A	G
85	2	+15V	Standard	B	E
86	2	+15V	Standard	B	F
87	2	+15V	Standard	B	G
91	2	+12V	Standard	A	E
92	2	+12V	Standard	A	F
93	2	+12V	Standard	A	G
95	2	+12V	Standard	B	E
96	2	+12V	Standard	B	F
97	2	+12V	Standard	B	G

^For 1e-10 per g, per axis option, see P/N: 501-27601-xx



Wenzel Associates, Inc.					
Austin, Texas					
Title: 10 MHz-SC Phase Lock Crystal Oscillator V2 (LBW=1Hz)					
P/N: 501-27592-xx	Rev: A	Date: 01-13-15	Drawn:	Ref: ULN	
Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ±0.030"	0.XXX Dec: ±0.010"	FSCM: 62821	Page 2 of 3	

Package A

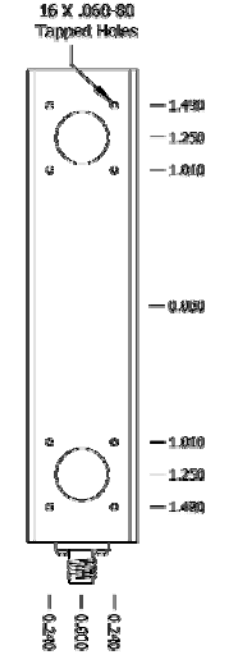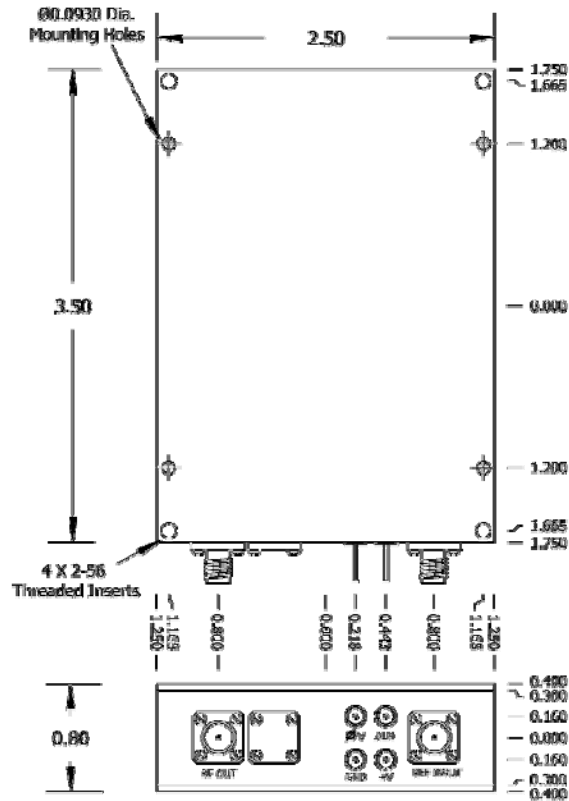

CONN	Function
#V	Phase Lock Voltage
RF Out	RF Signal Out
+V	Supply Voltage
ALM	Lock Alarm
GND	Ground, Case
REF INPUT	Reference Signal In

Package B

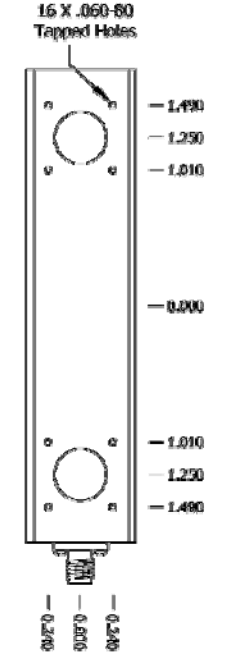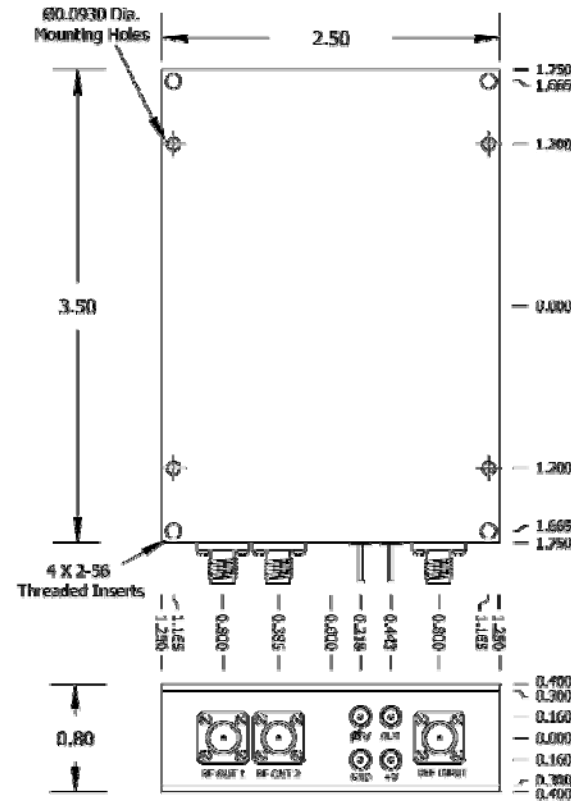

CONN	Function
#V	Phase Lock Voltage
RF Out 1	RF Signal Out
RF Out 2	RF Signal Out
+V	Supply Voltage
ALM	Lock Alarm
GND	Ground, Case
REF INPUT	Reference Signal In

Wenzel Associates, Inc.
Austin, Texas

Title:
**10 MHz-SC Phase Lock Crystal Oscillator V2
(LBW=1Hz)**

P/N: 501-27592-xx	Rev: A	Date: 01-13-15	Drawn:	Ref: ULN
-----------------------------	------------------	--------------------------	--------	-------------

Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ±0.030"	0.XXX Dec: ±0.010"	FSCM: 62821	Page 3 of 3
--	-----------------------------	------------------------------	-----------------------	-------------