

OUTPUTS

Output	Frequency	Level (into 50Ω)
A	10 MHz	+14 ±2 dBm
B	600 MHz	+16 ±2 dBm

STABILITY

Aging

- 1 x 10⁻⁷ first year
- after 30 days operating, typical
- 5 x 10⁻⁸ second year, typical
- 3 x 10⁻⁸ per year thereafter, typical

Phase Noise L(f), dBc/Hz, typical

	10 MHz	600 MHz
10 Hz	-140	-103
100 Hz	-160	-121
300 Hz	-165	-126
1 kHz	-172	-139
10 kHz	-174	-156
100 kHz	-175	-158

Temperature Stability

- ±5 x 10⁻⁹, 0 to +50°C (Ref. +25°C)

Harmonics

- ≤ -25 dBc

Sub-Harmonics

- ≤ -60 dBc

PLL Reference Products

- ≤ -60 dBc

Spurious

- ≤ -80 dBc, excluding power supply line related spurs

Phase Lock Alarm

- TTL
- Locked: +3.5 VDC to +5.2 VDC (Hi)
- Out-of-Lock: +0.8 VDC max (Lo)

Phase Lock Voltage Monitor

- Voltage monitor pin supplied

MECHANICAL

Dimensions

- 6.51 x 4 x 1"

Connectors

- RF Outputs: SMA(f)
- Power, Monitoring: Feed Thru Terminals
- GND: Ground Turret

Packaging

- Nickel-plated machined aluminum housing – J2PMX

Mounting

- Threaded inserts on base, #2-56, 11 places

POWER REQUIREMENTS

Warm-Up Power

- ≤ 16 Watts for 5 minutes

Total Power

- ≤ 11 Watts at +25°C

Supply Voltage

- +12 VDC ±5%

ADJUSTMENT

Mechanical Tuning (Internal 10 MHz)

- ±1 x 10⁻⁶

Loop BW (Internal 100 MHz PLL)

- Target Bandwidth: ~300 Hz
- Type 2 Loop

CRYSTAL

Type

- 10 MHz SC-cut
- 100 MHz SC-cut (x6)

ENVIRONMENT

Operating Temperature

- 0 to +50°C

Storage Temperature

- 50 to +85°C

OTHER

Label

- Use conventional label with the following information:
- 501-28949 (Current Rev.)
- 10M/600M MXO-PLMX
- +12 VDC
- Serial # - Date Code
- (Mark connectors with function)


Test Data

- Output Level
- Phase Noise
- Temperature Stability
- Harmonics, Subs, Products, Spurs
- Power – Warm-up and Total

REV	DATE	REVISION RECORD	DWN	AUTH
-	04-09-15	Initial Release	CB	
A	07-10-15	Adjusted output levels to 14 and 16 dBm	CB	

J2PMX MXO Connections

Connector	Function
1	Supply Voltage
2	Ground, Case
4	RF Output B
5	Phase Lock Voltage
6	Phase Lock Alarm
8	RF Output A

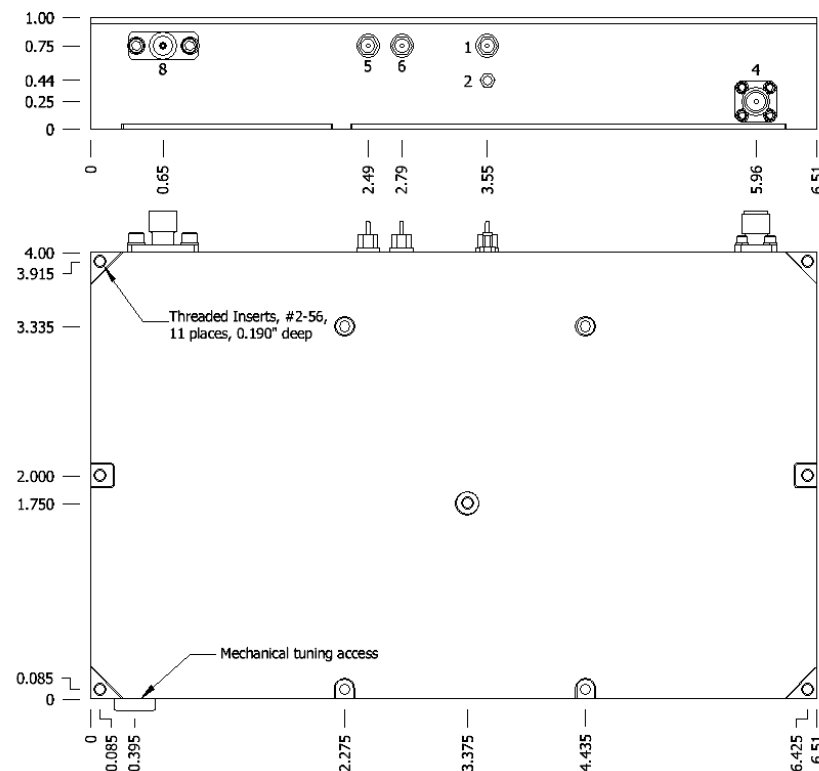

Wenzel Associates, Inc.
Austin, Texas

Title:
10 & 600 MHz Multiplied Crystal Oscillator (MXO-PLMX)

P/N: 501-28949	Rev: A	Date: 07-10-15	Drawn:	Ref:
--------------------------	------------------	--------------------------	--------	------

Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ±0.030"	0.XXX Dec: ±0.010"	FSCM: 62821	Page 1 of 1
--	-----------------------------	------------------------------	-----------------------	-------------